


FORM PTO-1390 (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 566.41234X00 filed February 25, 2002	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/069374	
INTERNATIONAL APPLICATION NO. PCT/JP00/05874		INTERNATIONAL FILING DATE August 30, 2000		PRIORITY DATE CLAIMED August 31, 1999	
TITLE OF INVENTION REMOTE ORDER ACCEPTANCE DESIGN SYSTEM AND ELEVATOR REMOTE ORDER ACCEPTANCE METHOD					
APPLICANT(S) FOR DO/EO/US AKASAKA, SHINGO ISHIDA, ATSUHIRO TANIGUCHI, SHIN'ICHI SUZUKI, HIDEAKI OKA, MASAHIRO and MORITA, AKIHIKO					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input type="checkbox"/> is transmitted hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office(RO/US) <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). a. <input checked="" type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11 to 20 below concern document(s) or information included: 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input checked="" type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: Figs. 1-19, 20a-20c, 21-25, 26a-26b, 27-28, 29a-29b, 30-33, 34a-34b, 35-27; Credit Card Payment Form; International Publication No. Wo 01/16812-coversheet; International Preliminary Examination Report; International Search Report w/refs.					

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER	
107069374		PCT/JP00/05874		566.41234X00	
21. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a) (1) - (5)): <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$1040.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4).....\$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total Claims	10 - 20 =	0	x \$18.00	\$	
Independent Claims	4 - 3 =	1	x \$84.00	\$84.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$974.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
SUBTOTAL =				\$974.00	
Processing fee of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$974.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$40.00	
TOTAL FEES ENCLOSED =				\$1,014.00	
				Amount to be refunded:	\$
				charged:	\$
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. <u>01-2135</u> in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>01-2135</u> . A duplicate copy of this sheet is enclosed.					
d. <input checked="" type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Antonelli, Terry, Stout & Kraus, LLP 1300 North Seventeenth Street Suite 1800 Arlington, VA 22209 USA					
				 SIGNATURE	
				Alan E. Schiavelli NAME	
				<u>32,087</u> REGISTRATION NO.	

REMOTE ORDER ACCEPTANCE DESIGN SYSTEM AND ELEVATOR
REMOTE ORDER ACCEPTANCE METHOD

5

Technical Field

The present invention relates to a design system for an order-made product and a method of supporting acceptance of an order for an elevator.

10

Background Art

In building processes, usually, a computer-aided design system (hereinafter, called a CAD system) is introduced into each process constituting the building processes. For example, Japanese Unexamined Patent Laid-Open No. 6-89314 describes a system that can be applied to an equipment design process among building processes. This system can quickly design an equipment that satisfies a requirements specification of a building designer.

On the other hand, information is transferred between processes solely by the medium of paper. For example, between a building frame design process and an equipment design process, specifications are usually transmitted and matched (for study of connection between a building and an equipment, and study of equipment fixing structure) on paper.

For transferring CAD data between CAD systems, the "DXF format" that defines an intermediate file format is used as a de facto standard for data exchange. For example, "A sequel to Wise use of a building CAD", published by Nikkei BP, Ltd. August, 1997, pp. 63 - 69 describes a system in which a constructor or the like obtains CAD

symbol data (in the DXF format) of various equipments from the equipment makers' side (equipment designers' side), through Internet, personal computer communication, or the like. According to this system, a building designer can grasp a shape and size of a required
5 equipment quickly and easily, and can make a study of connection whereby it is decided if the equipment can be housed in a building frame under design based on the grasped contents.

Disclosure of the Invention

10 In the above-mentioned conventional DXF format, however, data is expressed at the level of graphic elements such as a line segment, an arc, a circle, etc., without giving data expressions corresponding to structural members, for example, a wall, a pillar, a beam, etc., constituting a building. In other words, data only
15 required for making design drawings are transferred, and data required for understanding meanings in the design drawings are not transferred. Thus, for each article of equipment, an equipment designer must understand building structure depicted in a design drawing, and further, must extract features required for determining
20 fixing structures of the article (for example, existence or nonexistence of building elements such as a pillar and a beam, positional relations between the article to be fixed and surrounding building elements, sizes and materials of structural members, and the like) from the design drawings. Accordingly, the equipment designer consumes
25 much time for his work, i.e., for preparing a specification plan of the equipment suitable for a building structure plan of the building designer.

On the other hand, as an industry standard, building product

model formats such as IFC (Industrial Foundation Classes), STEP, etc., are going to be established, and interaction between related systems including a CAD system is being realized. A related technique is described in Padmaga, "Efficient use and standardization of building CAD data, I", pp. 117 - 124, published in June 1998 by Kenchiku Chishiki-sya. In this technique, a set of objects (a pillar, a wall, a door, etc.) required for model representation is defined as a class library, and access or calculation is performed on objects generated from this class. Such a CAD data exchange technique, which uses standard product models, can exchange definition data of building elements, such as a beam, a pillar, etc., which the above-mentioned DXF format can not exchange.

However, even if such a CAD data exchange technique using standard product models is employed, it nevertheless takes time to prepare an equipment specification plan suitable for a building structure plan of a building designer. The reason is that, in determining fixing structure for an equipment, it is necessary to extract objects related to the equipment out of large-scale building data of complex structure, in order to grasp features (existence or nonexistence of a pillar or a beam, a positional relation between the equipment and the surrounding structural members, etc.) for determining the fixing structure of the equipment, and then, in order to check interference between the equipment and the building structure. Furthermore, a building structure plan is repeatedly changed in the course of design, and it is necessary to check again the interference between the equipment and the changed building structure each time. Such operation requires quickness.

Thus, an object of the present invention is to provide a remote

order acceptance design system that can quickly prepare an installation structure plan for suitably installing an order-made article into a building under design. Further, another object of the present invention is to provide a remote order acceptance method that
5 supports processing of order acceptance until an order of a product is successfully accepted.

To attain the above objects, the present invention provides a remote order acceptance design system, comprising:

a database that stores CAD symbols each including effective
10 space information expressing an occupied space occupied by a product;

a first input receiving means for receiving input of a requirements specification of an order-made product that includes one or more equipments;

a data taking means for determining the occupied space of said
15 order-made product based on the requirements specification whose input is received by said first input receiving means, and for taking out a CAD symbol that includes effective space information conforming to said occupied space, from said database; and

a data output means for outputting the CAD symbol taken out
20 by said data taking means to an input source who has inputted the requirements specification of said order-made product.

According to the remote order acceptance design system of the present invention, the input source of the requirements specification of the order-made product can obtain a CAD symbol that includes
25 effective space information expressing a space occupied by the order-made product. When building data including this CAD symbol is generated by the input source of the requirements specification of the order-made product, it is possible to detect promptly existence of

interference within the occupied space of the order-made product, by calculation processing.

Thus, for example, the remote order acceptance design system according to the present invention may further comprises:

5 a product specification database that stores one or more pieces of location rule information expressing location rules of the equipments included in the product;

a second input receiving means for receiving input of building data that include a CAD symbol of said order-made product;

10 a structural features extracting means for extracting structural features within the occupied space expressed by the effective space information of the CAD symbol of said order-made product from the building data received by said second input receiving means, and for judging existence of interference in an installation area
15 of said order-made product, based on said structural features; and

an installation drawing generation means for taking out the location rule information corresponding to said CAD symbol from said product specification database, when it is judged that interference does not occur in the installation area of said order-made product, and
20 for generating installation drawing data for said order-made product based on said location rule information and said building data;
and

said data output means may output the installation drawing data generated by said installation drawing generation means to an
25 input source who has inputted said building data, when said second input receiving means receives the building data.

In that case, occurrence of interference within the occupied space of the order-made product is promptly checked based on the

building data generated in the input source who has inputted the requirements specification of the order-made product. Accordingly, installation drawing data, by which the order-made product can be appropriately installed in the building, can be provided to the input
5 source of the requirements specification of the order-made product, more promptly than the conventional case where interference check is performed by building designer's own judgment. Further, labor of the equipment designer is reduced.

Further, such a remote order acceptance design system may
10 further comprises:

a building data save means for saving the building data received by said second input receiving means, associating said building data with the input source of the building data; and

a correction management means for calculating difference
15 between building data after a change and building data before the change, when said second input receiving means receives the building data after the change, and for judging existence of interference in the order-made product's installation area defined by said building data after the change, based on said difference;

20 and

said installation drawing generation means may correct installation drawing data of said order-made product based on said location rule information and said building data after the change, when it is judged that interference does not occur in said order-made
25 product's installation area defined in the building data after the change.

In that case, even if building data is changed repeatedly in the course of design, occurrence of new interference caused by a change in

the building data is automatically and promptly checked. Accordingly, labor of the equipment designer is reduced, and at the same time, the input source of the requirements specification of the order-made product can obtain corrected installation drawing data, in shorter
5 time.

Further, to attain the above objects, the present invention provides an elevator remote order acceptance method, in which a computer distributes an elevator installation drawing to a user terminal through a network, wherein:

10 said method comprises a procedure of making said computer complete said elevator installation drawing step by step, based on data given sequentially from said user terminal; and

said procedure comprises one of steps mentioned below, or comprises two or more of said steps in a order mentioned below:
15 namely,

a step in which, when said computer receives input of building information relating to a building to be installed with said elevators, through a network, then, information on at least machine types of the elevators, which correspond to said building information, is returned
20 to an input source who has inputted said building information;

a step in which, when said computer receives input of a requirements specification for said elevators, through the network, then, a CAD symbol conforming to said requirements specification is returned to an input source who has inputted said requirements
25 specification; and

a step in which, when said computer receives input of building data, which include said CAD symbol, through the network, then, the elevator installation drawing based on said building data is returned

to an input source who has inputted said building data.

Brief Description of Drawings

Fig. 1 is a schematic block diagram showing a system
5 according to an embodiment of the present invention;

Fig. 2 shows, in an upper part, a view for explaining outline
structure of an elevator as an example of an order-made product, and,
in a lower part, its cross section;

Fig. 3 is a partial view for explaining structure of a fixing part
10 of the elevator;

Fig. 4 is a diagram for explaining a flow of remote order
acceptance design processing according to one embodiment of the
present invention;

Fig. 5 is a view showing a display example of a GUI employed
15 in a user terminal for a building designer;

Fig. 6 is a view showing a display example of a GUI employed
in a user terminal for a building designer;

Fig. 7 is a diagram showing a flow of data in remote order
acceptance design processing according to one embodiment of the
20 present invention;

Fig. 8 is a diagram showing a flow of data in remote order
acceptance design processing according to one embodiment of the
present invention;

Fig. 9 is a diagram showing a flow of data in remote order
25 acceptance design processing according to one embodiment of the
present invention;

Fig. 10 is a diagram showing a flow of data in remote order
acceptance design processing according to one embodiment of the

present invention;

Fig. 11 is a diagram showing a flow of data in remote order acceptance design processing according to one embodiment of the present invention;

5 Fig. 12 is a flowchart showing elevator path relevance building data automatic read processing, which is performed by a building data automatic read unit;

10 Fig. 13 is a schematic view showing processing of generating an elevator installation drawing, which is performed by a user terminal on the side of an equipment designer;

Fig. 14 is a flowchart showing processing of equipment selection/location calculation, which is performed by an equipment selection/location calculation processing unit;

15 Fig. 15 is a view showing an example of an elevator installation drawing generated by elevator installation drawing generation processing performed by a user terminal on the side of the equipment designer;

Fig. 16 is a schematic block diagram showing a system according to an embodiment of the present invention;

20 Fig. 17 is a flowchart showing a flow of remote processing according to an embodiment of the present invention;

Fig. 18 is a view showing an example of a WWW page opened on a display screen of a user terminal for a building designer;

25 Fig. 19 is a flowchart showing a flow of processing in S201 of Fig. 17;

Fig. 20 is a view showing examples of WWW pages opened on a display screen of a user terminal for a building designer;

Fig. 21 is a conception diagram of an elevator machine

type/number planning map related to an embodiment of the present invention;

Fig. 22 is a flowchart showing a flow of processing in S202 of Fig. 17;

5 Fig. 23 is a view showing an example of a WWW page opened on a display screen of a user terminal for a building designer;

Fig. 24 is a view showing an example of a WWW page opened on a display screen of a user terminal for a building designer;

10 Fig. 25 is a flowchart showing a flow of processing in S203 of Fig. 17;

Fig. 26 is a view showing examples of WWW pages opened on a display screen of a user terminal for a building designer;

Fig. 27 is a flowchart showing a flow of processing in S203 of Fig. 17;

15 Fig. 28 is a flowchart showing a flow of processing in S203 of Fig. 17;

Fig. 29 is a view showing examples of WWW pages opened on a display screen of a user terminal for a building designer;

20 Fig. 30 is a flowchart showing a flow of processing in S204 of Fig. 17;

Fig. 31 is a view showing an example of a WWW page opened on a display screen of a user terminal for a building designer;

Fig. 32 is a view showing examples of WWW pages opened on a display screen of a user terminal for a building designer;

25 Fig. 33 is a flowchart showing a flow of processing in S205 of Fig. 17;

Fig. 34 is a view showing examples of WWW pages opened on a display screen of a user terminal for a building designer;

Fig. 35 is a conceptual view showing data stored in an electronic file made by a building designer;

Fig. 36 is a flowchart showing a flow of processing in S205 of Fig. 17; and

5 Fig. 37 is a flowchart showing a flow of processing in S205 of Fig. 17.

Best Mode for Carrying Out the Invention

Now, referring to the attached drawings, an embodiment
10 according to the present invention will be described.

First, referring to Fig. 1, a configuration of a remote order acceptance design system of the present embodiment will be described.

On the side of a building designer, a user terminal 2 as a WWW client connected to a wide area network is installed. This user
15 terminal 2 (hereinafter, referred to as a building designer user terminal 2) has been already installed with a browser required for utilizing WWW, and with a CAD program that supports standard product models.

On the other hand, on the side of an equipment designer, a
20 WWW server 11 connected to the wide area network, a database server 12, and a user terminal 1 (hereinafter, referred to as an equipment designer user terminal 1) are installed. These are connected to one another through LAN.

The WWW server 11 comprises: (1) a symbol generation data
25 interface 3, through which requirements specification data for an order-made product can be received from the building designer user terminal 2, and a CAD symbol of the order-made product can be taken out from the side of the WWW client terminals; (2) an installation

drawing generation request interface 8, through which a request for studying installation structure for the order-made product can be received from the building designer user terminal 2, and installation structure data for the order-made product can be received from the side of the WWW client terminals; and (3) a CAD symbol automatic generation processing unit 7 that generates a CAD symbol automatically. Each of these components is a functional component implemented by software such as a CGI program or the like.

The database server 12 is provided with an external storage 9 that stores a drawing database. This drawing database registers a CAD symbol of each product. Each CAD symbol includes: product name information expressing a product name; structure information expressing structural features (size, shape, etc.) of the product; specification information, which includes cage capacity data (passenger capacity and loading capacity) and door opening mode data (center opening, or the like); effective space information expressing a space (hereinafter, referred to as an occupied space) that should be secured for installing the product; option data; and the like.

The equipment designer user terminal 1 comprises functional components implemented by programs read from a hard disk onto a memory. In detail, the equipment designer user terminal 1 comprises: a building data automatic read unit 4, which extracts structural features required for determining the installation structure of the product ordered; an equipment selection/location calculation processing unit 5, which performs an interference check based on the structural features extracted by the building data automatic read unit 4, and thereafter performs selection of component equipments and other operations; an installation drawing automatic generation

processing unit 6, which generates installation drawing data based on the processing results by the equipment selection/location calculation processing unit 5; a specification correction management unit 10, which checks interference based on difference between building data before and after a change when the building data are changed; and the like.

Further, the hard disk of the equipment designer user terminal 1 is installed with a CAD program that supports the standard product models, and, in addition, stores a product specification database and structural features database.

The product specification database registers location rule information that expresses installation structure of each product. For example, in the case of an elevator, the location rule information includes: names (cage, winch, etc.) of elevator's component equipments; names (intermediate beam, rail, etc.) of fixing parts for fixing the elevator's component equipments; a series of procedures for strength calculation of fixing structure of the elevator; a table that associates models of elevator's component equipments with respective specifications (width and depth in the case of a cage) of the component equipments; conditional expressions expressing positional relations between the elevator's component units; and the like (see Fig. 14).

Further, the structural features database registers building elements related to installation of an elevator into an elevator path, in the below-mentioned elevator path relevance building data automatic read processing.

Previous to describing remote order acceptance design processing performed in this system, structure of a rope drive elevator as an example of an order-made product will be described.

As shown in Fig. 2, in a rope drive elevator, a wire rope, which connects a cage with a counter weight, both placed in a vertical elevator path, is wound on a winding drum of a winch, and the cage is moved up and down within the elevator path by the driving force of the winch. A control panel for controlling the winch etc. is housed inside a machine room provided on a rooftop of a building. Further, on a bottom end of the elevator path, there is a safety device such as a shock absorber.

As shown in Fig. 3, to install such an elevator to a building, an intermediate beam is placed over beams of the building, and rails for guiding the cage and the counter weight are fixed to the intermediate beam by means of a rail bracket. Or, a rail for guiding the cage may be directly fixed to a wall of the building, depending on building structure of the building. Even when a plurality of such elevators are provided in the building, a basic method of installation is not changed, except that a plurality of cages are provided inside an elevator path.

Sizes (width and depth) of the elevator path should be determined to ensure an occupied space required for installing the mentioned component equipments (cage, rail for guiding the cage, etc.). In examination of connection performed on the side of the equipment designer, it is judged if such sizes of the elevator path can be secured, i.e., if the sizes of the elevator path are determined such that a pillar or the like does not cut into the occupied space required for installation of the cage etc. that have the sizes satisfying the specifications (passenger capacity, loading capacity, etc.) required by the building designer.

Now, thus-described elevator is taken as an example of an order-made product, and, referring to Fig. 4 and other figures (Figs. 5

– 11), CAD symbol acquisition processing performed between the building designer user terminal 2 and the WWW server 11 will be mainly described, out of a series of remote processing performed in the system shown in Fig. 1. Here, it is assumed that the building designer starts up the CAD program on the building designer user terminal 2, and designs a building with elevators, on a CAD window activated by the starting up.

The building designer designing a building with elevators must study fitting of the elevators, in the course of design. For that purpose, the designer should know sizes of an elevator path required for installation of the elevators, and know if the elevators can be housed in the elevator path in a design drawing.

In such a case, when the building designer starts up a browser on the building designer user terminal 2, then, connection between the building designer user terminal 2 and the WWW server 11 is established, and an elevator design WWW page as shown in Fig. 5 is opened (S401). This elevator design WWW page includes, for each elevator: an elevator purpose input box 50 for receiving input of a purpose of the elevator; a specification number input box 51 for receiving input of designation of a basic specification of the elevator; and a door opening direction input box 52 for receiving input of a door opening mode of the elevator. Thus, the building designer should input suitable data into the input boxes 51, 52 and 53 for each of the elevators to be installed. On this elevator design WWW page, when a purpose of an elevator is inputted into an elevator purpose input box, then, a list 54 of basic specifications of elevators used for the designated purpose is displayed. In detail, an information list is displayed, showing correspondence relationship between a cage

capacity (passenger capacity and loading capacity) and an ascension/descending speed. Thus, the building designer can select a suitable basic specification out of the list, and input a number of the selected specification into the specification number input box. Here, 5 options such as existence of a trunk, location of a counter weight, etc. may be selected additionally on this elevator design WWW page.

When the designer clicks a symbol display button 53 at the end of setting basic specification data etc. for each of the number of elevators required, then, a CAD symbol retrieval request, which 10 includes the basic specification data and the door opening direction data, is sent to the WWW server 11 (S402).

Receiving this CAD symbol retrieval request, the WWW server 11 extracts the basic specification data and the door opening direction data from the received data. The extracted data are stored as 15 requirements specification data into a buffer memory. At the same time, the WWW server 11 makes a request to the database server 12 for database retrieval using the basic specification data of the requirements specification data, as a retrieval key.

At that time, processing of the request received by the 20 database server 12 is performed by execution of the CGI program (see Fig. 7) read onto the memory.

The database server 12 searches the drawing database, to retrieve a CAD symbol that includes the basic specification data designated as the retrieval key, from the drawing database, and 25 returns the retrieved CAD symbol to the WWW server 11. At that time, when the database retrieval is unsuccessful, then, the database server 12 answers the WWW server 11 to that effect.

Receiving the return data from the database server 12, the

WWW server 11 performs the following processing depending on the return data.

When a CAD symbol is included in the return data, then, the WWW server 11 sends the CAD symbol as an answer to the input of the basic specification data etc., to the building designer user terminal 2 (see Fig. 7). By this, as shown in Fig. 6, this CAD symbol (i.e., the structure and effective space of an elevator conforming to the specification required by the building designer) is displayed as a parametric representation on the elevator design WWW page of the building designer user terminal 2. Fig. 6 shows a CAD symbol of one elevator, as an example of display. However, when the building designer has set basic specifications etc. for a plurality of elevators, then, a CAD symbol of the plurality of elevators (i.e., structure and effective space of an aggregation of the plurality of elevators) is displayed as a parametric representation.

On the other hand, when a message that the database retrieval is unsuccessful is included in the return data, then, the WWW server 11 makes a message displayed on the elevator design WWW page of the building designer user terminal 2 to the effect that an e-mail will be sent at the end of generation of a CAD symbol conforming to the requirements specification to report a storage location of the CAD symbol. In addition, the WWW server 11 requests input of a mail address as a destination for the e-mail message. When an answer to this request is received, then, the WWW server 11 once disconnects it from the building designer user terminal 2 (see Fig. 8).

Then, the CAD symbol automatic generation processing unit 7 converts the basic specification data designated by the building

designer into geometry (a shape and size of the cage, a shape and size of the counter weight, etc.) of each component part of the elevator according to a predetermined rules, and further, sets an occupied space around the assembly of those component parts according to their sizes. Further, using the determined occupied space and geometry of each component unit, and the product name information, the requirements specification data, etc., the CAD symbol automatic generation processing unit 7 generates a CAD symbol that includes the predetermined information (the product name information, structure information, specification information, effective space information, option data, and the like) (S403).

Thereafter, the WWW server 11 requests the database server 12 to register the newly-generated CAD symbol, and requests a mail server on the network to send an e-mail addressed to the building designer to inform him of the completion of the CAD symbol and its storage location (see Figs. 9 and 10). Here, each processing of requesting the database server 12 or the mail server is performed by executing a CGI program read onto the memory.

When the building designer knows the completion and storage location of the CAD symbol by means of an arrival of the e-mail from the WWW server 11 and downloads the CAD symbol from the storage location (see Fig. 11), then, the CAD symbol (i.e., the structure and effective space of the elevator conforming to the specification required by the building designer) is displayed as a parametric representation on the elevator design WWW page of the building designer user terminal 2.

Only by drag and drop of the CAD symbol from the elevator design WWW page and by placing the CAD symbol in the design

drawing in progress on a CAD window, the building designer can ascertain at a glance if the elevator satisfying the requirements specification interferes with the surrounding building elements (S404). For example, when the occupied space shown by the effective space information of the CAD symbol overlaps a surrounding building element (a pillar, a wall, or the like), then, the building designer judges that the elevator satisfying the requirements specification by himself can not be housed in the elevator path in the building design drawing. Thus, the building designer can recognize that at least one of the requirements specification of the elevator and the size of the elevator path in the building design drawing in progress should be changed. For example, when it is judged that the requirements specification of the elevator should be changed, then, the building designer makes a suitable change in the requirements specification to repeat the processing similar to the above until a suitable CAD symbol is obtained.

When it is judged that the elevator satisfying the requirements specification does not interfere with the surrounding building elements, or that interference between the elevator satisfying the requirements specification and the surrounding building elements is avoided by modifying the building drawing, then, the equipment designer (the elevator designer) performs elevator installation drawing generation processing on the building designer user terminal 1 of himself. In the following, this elevator installation drawing generation processing will be described referring to Fig. 4 and other reference drawings (Figs. 12 – 15).

The building designer sends building drawing data that includes the CAD symbol from the building designer user terminal 2 to

the equipment designer user terminal 1 (S405). When the equipment designer confirms reception of this sent data, and thereafter inputs an execution command for starting the installation drawing generation processing through an input unit (keyboard, mouse, or the like), then,
5 the following processing is executed sequentially on the equipment designer user terminal 1.

(1) Elevator path relevance building data automatic read processing (S406)

First, the building data automatic read unit 4 derives the
10 building drawing data from the data sent from the building designer user terminal 2, and extracts building elements relating to elevator's installation in the elevator path (in detail, pillars, walls and beams that may project into the elevator path) as characteristic structure, for each floor of the building.

15 In detail, as shown in Fig. 12, the building data automatic read unit 4 extracts all objects of three kinds of building elements, pillar, beam and wall from the building drawing data (S901). Then, taking this group of objects as the population, the building data automatic read unit 4 extracts objects that exist in the neighborhood
20 of the CAD symbol out of the population, for each floor of the building. In detail, this is performed as follows.

The building data automatic read unit 4 initializes an target floor parameter (S902), and then, derives various kinds of information included in the CAD symbol (S903).

25 Then, the building data automatic read unit 4 calculates the location and direction of the CAD symbol in the building drawing (S904). Further, a new rectangular coordinate system is defined such that the location of the CAD symbol becomes the origin and the

frontward direction of the CAD symbol is -Y direction. And, the coordinate system on the building drawing is transformed into this new rectangular coordinate system. By this operation, coordinates of the above-mentioned objects are transformed into coordinates in the
5 new coordinate system.

Then, the building data automatic read unit 4 extracts wall objects on the four sides of the CAD symbol out of the wall objects that are included in the above-mentioned group of objects and belong to the target floor (S905). At the same time, the building data automatic
10 read unit 4 checks parallelism of the CAD symbol with the wall objects on its four sides. When the CAD symbol is inclined in relation to the wall objects on the four sides, then, all the objects of the target floor in the building drawings are rotationally transferred by a rotation angle corresponding to the inclination. This corrects an error in the
15 building drawing owing to the drag and drop placement of the CAD symbol onto the building drawing.

Further, the building data automatic read unit 4 extracts beam objects on the four sides of the CAD symbol out of the beam objects that are included in the above-mentioned group of objects and
20 belong to the target floor (S906). Similarly, concrete pillar objects adjacent to the CAD symbol out of the pillar object that are included in the above-mentioned group of objects and belong to the target floor are extracted (S907), and further, steel pillar objects adjacent to the CAD symbol are extracted (S908). Then, after calculation of the floor
25 height of the target floor (S909), the record of the above-described calculation processing performed with respect to the target floor is outputted as a log file, and association information, which associates the result of the above-described calculation processing performed

with respect to the target floor with building drawing identification information (for example, a user name of the building designer, etc.), is stored into the structural features database (S910). The log file can be referred to at any time for the sake of working convenience of the building designer.

Thereafter, the building data automatic read unit 4 judges if the target floor is the top floor of the building (S911). If not, the target floor parameter is incremented by one (S912), and the processing is repeated from S905.

(2) Equipment selection/location calculation processing (S407)

When the processing S905 – S910 is performed for each floor up to the top floor in the elevator path relevance building data automatic read processing (S406), then, the equipment selection/location calculation processing unit 5 gets elevator location rule information out of the product specification database, to perform equipment selection/location calculation processing using the obtained information.

In detail, as shown in Fig. 14, the equipment selection/location calculation processing unit 5 gets the elevator location rule information out of the product specification database, and determines models of elevator's component units according to a correspondence relation defined in the table included in the location rule information. For example, in the case of a cage of the elevator, a model associated with the cage size included in the CAD symbol is determined as an accepted model (S101). In the case where the CAD symbol represents a plurality of elevators, models etc. of elevator's component units are determined for each elevator, according to the location rule information.

Then, the equipment selection/location calculation processing unit 5 locates the elevator's component units according to the location rule information. In detail, strength calculation is performed according to the procedures included in the location rule information.

5 And, a component unit that has not been located is located such that the component unit in question and the already-located component units have positional relations satisfying the conditional expressions included in the location rule information. In the case where the CAD symbol represents a plurality of elevators, locations of the component
10 units are determined for each elevator, according to the location rule information.

Further, the equipment selection/location calculation processing unit 5 judges if each object extracted as characteristic structure by the building data automatic read unit 4 cuts into the
15 space occupied by the elevator which is defined on the building drawing (S102).

When no object cuts into the space occupied by the elevator, then, the equipment selection/location calculation processing unit 5 judges that the elevator does not interfere with the surrounding
20 building elements, and locates the component units (cage, winch, etc.) whose names are included in the location rule information, at their predetermined locations, and further, locates the fixing parts (intermediate beam, fastener, etc.) whose names are included in the location rule information at their predetermined locations.

25 On the other hand, when there is an object that cuts into the space occupied by the elevator, then, the equipment selection/location calculation processing unit 5 requests the mail server on the network to send an e-mail addressed to the building designer to inform him to

the effect that the elevator interferes with the surrounding building elements. From the arrival of this e-mail, the building designer can recognize that the elevator interferes with the surrounding building elements, and thus, he can promptly start considering a change of the building drawing data in the course of designing.

The building designer, who has received an e-mail informing him of the interference between the elevator and the surrounding building elements, must correct the building drawing to obtain installation drawing data. When the building designer sends the corrected building drawing data from his user terminal 2 to the equipment designer user terminal 1, then, the building data automatic read unit 4 extracts characteristic structure from the building drawing data, similarly to the above-described case. However, in the present case, after the extraction of the characteristic structure, the specification correction management unit 10 calculates difference between the characteristic structure extracted this time and the characteristic structure extracted last time (i.e., characteristic structure data stored in the structural features database, and checks interference, only with respect to objects corresponding to the difference. When there is no interference, the equipment selection/location calculation unit 5 performs processing similar to the above-described equipment selection/location calculation processing (S407), and then, the installation drawing automatic generation processing unit 6 performs processing similar to the above-described installation drawing generation processing (S408), to complete the installation drawing data.

Thus, even if the building drawing data is changed in the course of design, generation of new interference owing to a change of

the building drawing data is promptly and automatically checked. And thus, labor of the equipment designer is reduced and equipment designer's time required for obtaining installation drawing data is shortened.

5 The building designer, who has received an e-mail informing him of the interference between the elevator and the surrounding building elements, must correct the building drawing to obtain installation drawing data. When the building designer sends the corrected building drawing data from his user terminal 2 to the
10 equipment designer user terminal 1, then, the building data automatic read unit 4 extracts characteristic structure from the building drawing data, similarly to the above-described case. However, in the present case, after the extraction of the characteristic structure, the specification correction management unit 10 calculates difference
15 between the characteristic structure extracted this time and the characteristic structure extracted last time (i.e., characteristic structure data stored in the structural features database, and checks interference, only with respect to objects corresponding to the difference. When there is no interference, the equipment
20 selection/location calculation unit 5 performs processing similar to the above-described equipment selection/location calculation processing (S407), and then, the installation drawing automatic generation processing unit 6 performs processing similar to the above-described installation drawing generation processing (S408), to complete the
25 installation drawing data.

Thus, even if the building drawing data is changed in the course of designing, generation of new interference owing to a change of the building drawing data is promptly and automatically checked.

And thus, labor of the equipment designer is reduced and equipment designer's time required for obtaining installation drawing data is shortened.

(3) Installation drawing generation processing (S408)

5 When the locations of the fixing parts are determined in the equipment selection/location calculation processing (S407), then, the installation drawing automatic generation processing unit 6 performs installation drawing generation processing based on the data obtained in the equipment selection/location calculation processing (S407). In
10 detail, the elevator's component units and fixing parts are placed in the building drawing at their locations determined by the result of the equipment selection/location calculation processing. For example, when it is scheduled to install three elevators in the building, execution of this installation drawing generation processing generates
15 an installation drawing as shown in Fig. 15. Then, the building drawing data are sent as installation drawing data to the sender of the original building drawing (S409).

 According to the above-described installation drawing generation processing, existence of interference in the occupied space
20 of the elevator is promptly and accurately checked by the calculation processing. Thus, it is possible to provide installation drawing data, which can ensure suitable installation of an elevator in a building, more promptly to a building designer than the case where the building designer checks interference on his own judgement. And, it is
25 possible to satisfy building designer's desire of early grasping of installation structure. Further, labors of an equipment designer is reduced also. Fig. 13 shows concisely the flow of the installation drawing generation processing.

When the above-described network system is extended, it is possible to provide more diversified services to an equipment designer. In the following, this extended system will be described, stressing different points from the above-described system.

5 As shown in Fig. 16, on the side of the equipment designer in this case, are installed a management terminal 112, a plurality of user terminals 1, 100, in addition to the above-mentioned WWW server 11 and database server 12. Similarly to the above-described case, these are connected to one another through LAN.

10 Among the plurality of user terminals 1, 100, there exist at least one of the above-described equipment designer user terminal 1 and at least one user terminal 100 (hereinafter, referred to as an artistic designer terminal 100) having a new function.

 This artistic designer user terminal 100 comprises: (1) a
15 requirements specification read unit 122, which requests the database server 12 to retrieve a design information file etc.; (2) a structure study processing unit 123, which determines elevator interior decoration structure based on the design information file, etc.; (3) an artistic design drawing generation processing unit 124, which
20 generates elevator artistic design drawing data etc. based on a result of determination by the structure study processing unit 123; (4) a specification correction management unit 125, which calculates difference between artistic design requirements specifications before and after a change when it is requested to change the elevator artistic
25 design drawing data; and the like; as functional components implemented by CPU and software read from a built-in hard disk onto a memory.

 Further, the built-in hard disk of the artistic designer user

terminal 100 is installed with a CAD program for standard product models. In addition, the artistic designer user terminal 100 stores a material database. This material database registers product specification information that indicates product specifications (shape, size, quality, function, etc.) of each interior material of order-made product. For example, in the case of a decorative steel plate used as a side plate material for an elevator cage, length, width, and the like of a decorative steel plate marketed as a product are registered as product specification information.

Then, the management terminal 112 comprises: (i) a time limit answer processing unit 113, which estimates the dead line on the equipment designer's side; (ii) a post assignment processing unit 114, which assigns a drawing generation request from a building designer to individual persons in charge of the design; and the like; as functional components implemented by CPU and software read from a built-in hard disk onto a memory. Further, an external storage 117 of the management terminal 112 stores two databases 115 and 116 for storing data required for executing processing by each processing unit 113, 114. One database 115 (a load management database) registers, for each person in charge of the design, identification information (name, ID number, mail address, etc.) of that person, and a case ID and dead line of a case under his charge. And, the other database 116 (a service management database) registers, for each service provided from the equipment designer's side, identification information of a person in charge, who provides the service in question.

In this case, the external storage 9 of the database server 12 further stores a building drawing management database, an installation drawing management database, an artistic design drawing

management database, and a customer's specification management database, in addition to the above-mentioned drawing database.

The building drawing management database registers, for each case, a case ID, and building drawing data. Further, the installation drawing management database registers, for each case, a case ID, and installation drawing data. Further, the artistic design drawing management database stores, for each elevator, elevator artistic design drawing data, elevator perspective drawing data, and various kinds of data (elevator door opening direction, elevator's passenger capacity, a ceiling design pattern, material data, etc.) used for generating the elevator artistic drawing data and the elevator perspective drawing data. Further, the customer's specification management database registers studied information relating to an entrusted case, a case ID assigned to the entrusted case, and additional information (database registration data, mail address of a building designer, etc.) relating to the entrusted case.

Further, in this case, the WWW server 11 further comprises three input-output interfaces (4), (5) and (6) implemented by software such as a CGI program, in addition to the above-mentioned interfaces 3 and 8 and the CAD symbol automatic generation processing unit 7. Namely, the WWW server 11 further comprises: (4) a machine type/number planning interface 103, through which building information (purpose of a building, the number of floors, resident population of each floor, etc.) relating to the building, to which the elevator is to be installed, can be received from the building designer user terminal 2, and an elevator machine type/number plan can be gotten from the side of the building designer user terminal; (5) a design image generation interface 107, through which an elevator

interior decoration study request can be received from the building designer user terminal 2, and elevator interior decoration image data can be gotten from the side of the WWW client terminals; and (6) an artistic design drawing generation request interface 108, through which an elevator artistic design drawing generation request can be received from the building designer user terminal 2, and elevator artistic design drawing data and elevator perspective drawing data can be taken out from the side of the WWW client terminals.

Further, an external storage 126 of this WWW server 11 stores a building features database. The building features database registers, for each purpose (office building, apartment house, or the like) of a building, an elevator machine type/number planning map prepared for a building of that purpose. In each elevator machine type/number planning map, recommended elevator machine type/number planning information (recommended passenger capacity of an elevator, recommended transport speed of an elevator, and recommended number of elevators to be installed) can be obtained using a combination of the number of floors and resident population of the building as a retrieval key. For example, Fig. 21 shows conceptually data structure of an elevator machine type/number planning map for an office building. When this elevator machine type/number planning map is used in the case where the number of floors is "10" and resident population is "300", then, as recommended elevator machine type/number planning information, the elevator transport speed "105 m/min", the elevator passenger capacity "9", and the number of elevators to be installed "2" are obtained.

Next, a series of remote processing performed in the network system shown in Fig. 16 will be described step by step. Here,

similarly to the above-described cases, an elevator is taken as an example of an order-made product.

As shown in Fig. 17, remote processing of the present embodiment is divided into the following five stages (a first stage S201, a second stage S202, a third stage S203, a fourth stage S204, and a fifth stage S205) seen from the side of a building designer who receives the service.

(1) First stage (S201)

A flowchart of Fig. 19 shows a flow of detailed processing in this first stage (S201).

A building should be installed with elevators appropriate for traffic demand in the building. For example, the optimum transportation capacity of elevators to be installed differs depending on a purpose (office building, apartment house, or the like) of the building. Even if buildings have the same purpose, optimum transportation speeds of elevators to be installed in them differ depending on their heights. Thus, a building designer who designs a building provided with elevators should previously know specifications and number of elevators appropriate for the purpose and resident population of the building.

In such a case, the building designer first starts up a browser on his building designer user terminal 2, and establishes connection between his building designer user terminal 2 and the WWW server 11, to open a WWW page that provides elevator design service on his building designer user terminal 2. As shown in Fig. 18, a case ID input box 155, which is used for inputting a case ID of a study request, and a list of services provided 150 – 154 are arranged on the top page of this WWW page that provides the elevator design service.

On this page, when the building designer selects "machine type/number planning service" 150 from the list of the services provided, while inputting nothing into the case ID input box 155, then, a building information input page 160 as shown in Fig. 20(a) is opened
5 on the display screen of the building designer user terminal 2.

On this building information input page 160, is arranged a tool kit for inputting building information (purpose of a building to which elevators are to be installed, the number of floors of the building, and resident population of the building) relating to the building to which
10 elevators are to be installed. In detail, on this page, are arranged: a building purpose input box 161 for inputting a purpose of the building to be installed with elevators; a building floor number input box 162 for inputting the number of floors of the building to be installed with elevators; a resident population input box 163 for inputting resident
15 population of the building to be installed with elevators; and an OK button 164 for confirmation of setting the data in all the input boxes. Thus, after inputting appropriate data into these input boxes 161, 162 and 163, the building designer should click the OK button 164. Here, the input boxes 161, 162 and 163 are attached with respective buttons,
20 and, a click of each button opens a pull-down menu showing a list of input data candidates to be inputted into an input box concerned. Thus, the building designer can simply select a suitable input data candidate as input data into each input box, from the list in the pull-down menu. For example, when the button attached to the
25 building purpose input box 161 is clicked, then, a pull-down menu 161A showing a list of standard purposes (office building, government office building, apartment house, etc.) of a building installed with elevators is opened. Thus, the building designer can determine input

data into the building purpose input box 161 by selecting one suitable building purpose from the list of these building purposes.

When the building designer finishes inputting data into the input boxes 161, 162 and 163, and thereafter, clicks the OK button 164,
5 then, an elevator machine type/number planning retrieval request, which includes setting data (building information) set in the input boxes 161, 162 and 163, is sent to the WWW server 11 (S2011).

Receiving this elevator machine type/number planning retrieval request, the WWW server 11 takes out the building
10 information (purpose of the building, the number of floors, and resident population) out of the request received, and performs database retrieval using the building information as retrieval keys. In detail, the WWW server 11 searches the building features database, and, out of the elevator machine type/number planning map (see Fig.
15 21) associated with one retrieval key (purpose of the building), recommended elevator machine type/number planning information associated with the remaining two retrieval keys (the number of floors and resident population) is obtained (S2012).

Then, the WWW server 11 returns the retrieval result
20 (recommended passenger capacity of an elevator, recommended transport speed of an elevator, and the recommended number of elevators to be installed) to the building designer user terminal 2. By this, an elevator machine type/number plan display page 165 as shown in Fig. 20(b) is opened on the display screen of the building designer
25 user terminal 2. And, the building purpose designated by the building designer and the retrieval results (recommended passenger capacity of an elevator, recommended transport speed of an elevator, and the recommended number of elevators to be installed) by the

WWW server 11 are displayed as an elevator machine type/number plan 166. In addition, a message is displayed for asking if the elevator machine type/number plan displayed should be saved, while displaying two underlined letters "Y" and "N" for receiving a reply to the message (S2013). Here, when the building designer clicks the underlined letter "N" on one side, then, the top page shown in Fig. 18 is opened again on the display screen of the building designer user terminal 2 (S20215). When, however, the other underlined letter "Y" is clicked, a data save request, which includes the elevator machine type/number plan on display, is sent to the database server through the WWW server 11 (S2014).

Receiving this data save request, the database server 12 registers anew the elevator machine type/number plan (studied information on the entrusted case) included in the request into the customer's specification management database, associating it with the youngest case ID among unregistered case IDs and the present date (S2015). When the new data registration into the customer's specification management database is finished, the new case ID registered at this time is returned to the building designer user terminal 2 through the WWW server 11 (S2016). By this, a case ID confirmation page 168 as shown in Fig. 20(c) is opened on the display screen of the building designer user terminal 2. This case ID confirmation page displays the new case ID assigned to the entrusted case, and an OK button 169 is arranged on this page. When the building designer confirms the new case ID and thereafter clicks the OK button 169, then, the top page (see Fig. 18) is displayed again on the building designer user terminal 2. And, at the same time, the service name "machine type/number planning service" of the service

provided this time and the new case ID are saved, being associated with each other.

In building design of a building installed with elevators, a building designer does not always study fitting of the elevators immediately after determination of an elevator machine type/number plan. In many times, before studying the fitting, the design of the building is usually further proceeded. According to this extended system, when the elevator machine type/number plan 166 displayed on the WWW page has no particular problem, the plan 166 can be saved into the database on the network for the time being. Thus, the building designer can disconnect his building designer user terminal 2 from the WWW server 11, and return to his building design work.

(2) Second stage (S202)

A flowchart of Fig. 22 shows a flow of detailed processing in this second stage (S202).

In the subsequent process of the building design, reaching at a stage where the fitting of the elevator is to be studied, the building designer establishes the connection between his building designer user terminal 2 and the WWW server 11 again, to open the WWW page that provides the elevator design service on his building designer user terminal 2 (see Fig. 18).

When the building designer, who proceeds with the study based on a plan different from the elevator machine type/number plan presented last time, selects the service provided, "elevator CAD symbol providing service" 151, while inputting nothing into the case ID input box 155, then, the elevator design page shown in Fig. 5 is opened on the display screen of the building designer user terminal 2.

As described above, the building designer should at least input

data (purpose of an elevator, specification number of the elevator, or door opening direction) into each of the input boxes 50, 51 and 52, for each of the number of elevators to be installed on this page (S2022). Selection of options, such as existence of a trunk, location of a counter weight, and the like, may be made appropriately if necessary.

On the other hand, when the building designer, who proceeds with the study based on the elevator machine type/number plan presented last time, inputs the case ID issued last time into the case ID input box 155 and thereafter pushes a return key, then, the text on the WWW page is changed in its style. In detail, in the list of the names of the services provided on the WWW page shown in Fig. 18, the service name displayed next to the service name "machine type/number planning service" that corresponds to the inputted case ID and is presently saved, namely, the service name "elevator CAD symbol providing service" 151 of the service that the building designer is to receive next is highlighted. By this, the building designer can grasp at a glance the service to receive first in this access, even if a long time has elapsed from the last access.

Thereafter, when the building designer selects the service provided "elevator CAD symbol providing service" 151, then, a studied information retrieval request, which includes the case ID inputted into the case ID input box 155, is sent to the database server 12 through the WWW server 11. The database server 12 makes a database search, using, as a retrieval key, the case ID included in this retrieval request, to take out studied information (purpose of the building, recommended number of elevators to be installed, recommended passenger capacities of the elevators, and recommended transport speeds of the elevators) from the customer's specification management

database, and returns this information (S2023).

An elevator basic specification input page shown in Fig. 23 is displayed on the building designer user terminal 2 that has received this return data (the purpose of the building, the recommended number of the elevators to be installed, the recommended passenger capacities of the elevators, and the recommended transport speeds of the elevators). In this case, however, default data (the purpose of the building, the recommended number of elevators to be installed, and recommended transport speeds of the elevators, included in the return data) have been already set in a building purpose input box 170, and cage capacity input boxes 173 and transport speed input boxes 175 corresponding to the recommended number of elevators included in the return data. Thus, it is sufficient that the building designer only sets appropriate data into elevator purpose input boxes 171 and door opening direction input boxes 172 corresponding to the recommended number of elevators, and, if necessary, changes the default data of the cage capacity input boxes 173 and the transport speed input boxes 175 (S2024). Further, with respect to selection of options, such as existence of a trunk, location of a counter weight, and the like, appropriate data may be set into each of the input boxes 174 and 176 if necessary.

Now, when the building designer sets the required data and thereafter clicks the symbol display button 53 or 177 on the page of Fig. 5 or 23, then, the database server 12 performs database retrieval for a CAD symbol, similarly to the above-described case (S2025).

At that time, when the database server 12 succeeds in the database retrieval for a CAD symbol (S2026), then, the retrieval result is returned to the building designer user terminal 2, similarly to the

above-described case (S2029). By this, similarly to the above-described case, a CAD symbol 180 conforming to the requirements specification of the building designer is displayed on the building designer user terminal 2 as shown in Fig. 24 (S20210). In
5 this case, however, a message 181 is displayed for asking if the CAD symbol on display and its related information should be saved, while displaying two underlined letters "Y" and "N" for receiving a reply to the message.

Here, when the building designer clicks the underlined letter
10 "N" on one side (S20211), then, the top page (see Fig. 18) is opened again on the display screen of the building designer user terminal 2. When, however, the other underlined letter "Y" is clicked (S20211), then, a data save request, which includes the CAD symbol on display and its related information (building information, the number of
15 elevators to be installed, transport speed, passenger capacity, door opening direction, etc.), is sent to the database server 12 through the WWW server 11. Here, when a case ID has been already assigned to the case in which supply of the CAD symbol is requested this time, then, the case ID is also sent together with the data save request to
20 the database server 12 at this time.

Receiving this data save request, the database server 12 takes out the case ID from the data save request (S20212).

Here, when a case ID can not be taken out from the data save request, then, the CAD symbol etc. (studied information relating to the
25 entrusted case) included in the data save request are registered anew into the customer's specification management database, associating them with the youngest case ID among unregistered case ID and the present date. Thereafter, the new case ID registered this time is

returned to the building designer user terminal 2 through the WWW server 11 (S20213).

By this, a case ID confirmation page 168 as shown in Fig. 20(c) is opened on the display screen of the building designer user terminal 2. This case ID confirmation page displays the new case ID assigned to the case entrusted by the building designer, and an OK button 169 is arranged on the page. When the building designer confirms the new case ID and thereafter clicks the OK button 169, then, the top page shown in Fig. 18 is displayed again on the building designer user terminal 2. And, at the same time, the service name "elevator CAD symbol providing service" of the service provided this time and the new case ID are saved, being associated with each other.

On the other hand, when the case ID can be taken out from the data save request, then, the database registration date and studied information registered in the customer's specification management database being associated with that case ID are updated with the present date and CAD symbol etc. included in the data save request. Thereafter, a message that database registration of the CAD symbol has been successful is returned to the building designer user terminal 2 through the WWW server 11 (S20214). On the side of the building designer user terminal 2 that receives this message, the top page of Fig. 18 is displayed again on the building designer user terminal 2. And, at the same time, the service name "elevator CAD symbol providing service" of the service provided this time and the new case ID are saved, being associated with each other.

When the database server 12 fails in the database retrieval of a CAD symbol (S2026), then, similarly to the above-described case, the WWW server 11 disconnects it from the building designer user

terminal 2, and thereafter, generates a CAD symbol conformed to the requirements specification of the building designer (S2027). Then, similarly to the above-described case, the WWW server 11 requests the database server 12 to register the newly-generated CAD symbol, and
5 request the mail server on the network to distribute an e-mail addressed to the building designer to inform him of the completion of the CAD symbol and its storage location (S2028).

When the building designer knows the completion and storage location of the CAD symbol by means of an arrival of the e-mail from
10 the WWW server 11 and downloads the CAD symbol from the storage location, then, similarly to the above-described case, the CAD symbol 180 conformed to the requirements specification of the building designer is displayed on the building designer user terminal 2, as shown in Fig. 24 (S20210). In this case, however, a message 181 is
15 displayed for asking if the CAD symbol on display should be saved, while displaying two underlined letters "Y" and "N" for receiving a reply to the message. Here, no matter which of the two underlined letters "Y" and "N" the designer clicks (S20211), processing is performed similarly to the case where database retrieval of a CAD
20 symbol has succeeded.

In some cases, the same building designer undertakes designing of a plurality of buildings (for example, buildings of chain stores) proving a sensation of unity in their insides, at different times respectively. It is supposed that those plurality of buildings are
25 installed with elevators having common basic specifications (transport speed, and passenger capacity) etc. Accordingly, in this extended system, a CAD symbol and its related information provided on the WWW page are registered into the customer's specification

management database on the network when the designer wishes, so that the CAD symbol and basic specification data can be downloaded any number of times after that, if the designer needs them.

(3) Third stage (S203)

5 A flowchart of Fig. 25 shows a flow of detailed processing in the first half of this third stage (S203).

10 In the subsequent process of the building design, reaching at a stage where plotting of an installation drawing is to be requested to the equipment designer (elevator designer), the building designer establishes the connection between his building designer user terminal 2 and the WWW server 11 again, to open the WWW page (as shown in Fig. 18) that provides the elevator design service.

15 When, in the case of the building designer who has generated building drawing data by using a CAD symbol that was not saved at the time of last access, the building designer selects "elevator installation drawing generation service" 152 on the top page of Fig. 18 from the list of services provided while inputting nothing into the case ID input box 155, then, an installation drawing generation page shown in Fig. 26(a) is opened. On this page, are arranged tools for inputting
20 data required for an elevator installation drawing generation request. In detail, on this page, are arranged: a case ID input box 190 for inputting a case ID with which generation of installation drawing data is requested; an elevator installation number input box 191 for inputting the number of elevators to be installed; a building purpose
25 input box 192 for inputting a purpose of a building to be installed with the elevators; a building floor number input box 193 for inputting the number of floors of the building to be installed with the elevators; input boxes 194 for inputting respectively basic specifications etc. for

the elevators; a building drawing data input box 195 for inputting a file name of building drawing data; a drawing requisition date input box 196 for inputting a desired dead line (date) for receiving an installation drawing; and a sending button 197 for instruction of
 5 sending the data set in the input box. Here, the case ID input box 190 is displayed as an inactive box.

In this case, when the building designer inputs suitable data into the boxes 191 – 196 other than the case ID input box 190 and thereafter clicks the sending button 164 (S2031), then, an installation
 10 drawing generation request, which includes the data set into the input boxes 191 – 196 other than the case ID input box 190, is sent to the equipment designer user terminal 1 through the WWW server 12 (S2032).

On the other hand, in the case of the building designer who
 15 has generated building drawing data by using the CAD symbol saved at the time of last access, when the building designer inputs, the case ID issued last time into the case ID input box 155 as a case ID of the installation drawing generation request, and pushes the return key, then, the text on the top page is changed in its style. In detail, in the
 20 list of the names of the services provided, on the top page of Fig. 18, the service name displayed next to the service name “elevator CAD symbol providing service” that corresponds to the installation drawing generation request case ID and is presently saved, namely, the service name “elevator installation drawing generation service” 152 of the
 25 service that the building designer is to receive next is highlighted. By this, the building designer can grasp at a glance the service to receive first in this access, even if a long time has elapsed from the last access.

Thereafter, when the building designer selects the service provided "elevator installation drawing generation service" 152, then, a studied information retrieval request, which includes the installation drawing generation request case ID, is sent to the database server 12 through the WWW server 11. The database server 12 makes a database search using, as a retrieval key, the case ID included in this retrieval request, to take out studied information from the customer's specification management database, and returns this information.

An installation drawing generation request page shown in Fig. 26(a) is displayed on the building designer user terminal 2 that has received this return data (S2033). In this case, however, default data (the case ID, the number of elevators, the purpose of the building, the number of floors, the passenger capacities of the elevators, the transport speeds of the elevators, door opening directions, option data, etc.) have been already set in the input boxes 190 – 194 other than the building drawing data input box 195 and the drawing requisition date input box 196. Thus, it is sufficient that the building designer only sets suitable data into the building drawing data input box 195 and the drawing requisition date input box 196 (S2034). When the building designer inputs these data and thereafter clicks the sending button 164, then, a data save request, which includes the setting data in the input boxes 190 – 196, is sent to the database server 12 through the WWW server 12.

Now, receiving the data save request from the building designer user terminal 2, the database server uploads the building drawing data corresponding to the file name included in this data save request (S2035). Then, the case ID included in this data save request

and the building drawing data are registered into the building drawing management database, being associated with each other, and the case ID registered at this time is sent to the building designer user terminal 2.

- 5 The building designer user terminal 2 sends the installation drawing generation request, which includes this returned case ID, to the management terminal 112 through the WW server 11. The management terminal 112 first takes out identification information of equipment designers who provide the installation drawing generation
- 10 service, from the service management database 116. Further, case IDs and their dead lines corresponding to each piece of identification information obtained this time are taken out from the load management database 115.

- Based on the results, the equipment designer having the least
- 15 number of cases under his charge is determined as a person to whom plotting of the present installation drawing is requested. The dead line of the installation drawing to be requested this time is determined by adding a predetermined working period to the dead line of the last case under the charge of this equipment designer. Then, the
- 20 management terminal 112 sends the result determined this time to the WWW server 11, and updates the load management database 115 with the result determined this time.

- Receiving the sent data, the WWW server 11 requests the mail server on the network to distribute an e-mail addressed to the person
- 25 in charge to inform him of the file name and storage location of the building data, the case ID, and the dead line, and, at the same time, sends the case ID and the dead line to the building designer user terminal 2 (S2036).

By this, a dead line answer page shown in Fig. 26(b) is opened on the display screen of the building designer user terminal 2. On this dead line answer page, are displayed the case ID 198 and the dead line 199 included in the return data. Further, an OK button 200 is arranged on this dead line answer page. When the building designer confirms the contents on display and thereafter clicks the OK button 169, then, the top page of Fig. 18 is opened again on the display screen of the building designer user terminal 2, and the service name "elevator installation drawing generation service" of the service provided this time and the case ID of the case of the installation drawing generation request are saved being associated with each other.

Flowcharts of Figs. 27 and 28 show a flow of detailed processing in the latter half of this third stage.

In the equipment designer user terminal 1 of the equipment designer determined as the person in charge of the installation drawing requested this time, processing shown in Fig. 27 is performed when the time determined in his schedule arrives. First, the building drawing data is taken out from the building drawing management database (S20312), and further, the studied information is taken out from the customer's specification management database (S20313). Then, based on these data, the above-described elevator path relevance building data automatic read processing and equipment selection/location calculation processing (S20314) are performed. Further, the installation drawing generation processing (S20315) is performed, and the installation data generated as a result of the processing is registered together with the installation drawing generation request case ID into the installation drawing management

database (S20316). Then, detailed data that have been determined in the above-mentioned processes are registered as studied information additionally into the customer's specification management database, and the mail server on the network is requested to distribute an e-mail addressed to the client to inform him of the storage location of the installation drawing data and the case ID of the installation drawing generation request (S20317).

When the building designer knows the completion of the installation drawing data by means of an arrival of the e-mail, then, in order to download the installation drawing data, he starts up again the browser on his building designer user terminal 2 to establish connection between his building designer user terminal 2 and the WWW server 12, and to open an installation drawing download page as shown in Fig. 29(a) on the display screen of his building designer user terminal 2. On this installation drawing download page, are arranged a case input box 210 for inputting the case ID of the installation drawing generation request for the installation drawing that he wishes to download, and a sending button 211 for instruction of sending the case ID of the installation drawing generation request. When the building designer inputs the installation drawing generation request case ID that he knows from the e-mail into the case input box 210, and further, clicks the sending button 211 (S2038), then, a page as shown in Fig. 29(b) is opened. On this page, is arranged an underlined character string 212 for instructing download of the installation drawing data. When the building designer clicks this character string 212, then, an installation drawing retrieval request including the installation drawing generation request case ID is sent to the database server 12 through the WWW server 11.

Correspondingly, the database server 12 takes out the installation drawing data associated with the installation drawing generation request case ID from the installation drawing management database (S2039). Then, the installation drawing data are downloaded to the
5 building designer user terminal 2 (S20310).

Working hours on the building designer's side and those on the equipment designer's side do not always coincide with each other. Further, even when the equipment designer receives a new installation drawing generation request from the building designer,
10 the equipment designer can not always deal with a new installation drawing generation request immediately, depending on a relation to formerly-received installation drawing generation requests, or the like. Similarly, also the building designer's side does not proceed with his working according to completion of the installation drawing data on
15 the side of the equipment designer. Namely, the building designer's side and the equipment designer's side make their respective schedules, and it is not possible for each side to always adjust his schedule to the partner. Thus, according to this extended system, the building designer user terminal and the equipment designer user
20 terminal exchange drawing data through databases, and such arrangement absorbs a time lag that may occur between the progress of the design work on the side of the building designer and the progress of the installation drawing work on the side of the equipment designer.

25 Further, a present state of load of each equipment designer is managed, and a new installation drawing generation request is entrusted to the equipment designer who has the lightest load at present. Such arrangement gives advantages to the building

designer's side by shortening his waiting time between a request and completion of an installation drawing, and to the equipment designer's side by improving overall working efficiency caused by leveling of his loads.

5 (4) Fourth stage (S204)

A flowchart of Fig. 30 shows a flow of detailed processing in this fourth stage (S204).

When the elevator installation drawing data is completed (by an equipment designer or by the building designer himself), then, the building designer must study specification of interior decoration. Reaching this stage, the building designer establishes again connection between his building designer user terminal 2 and the WWW server 11, to open the WWW page that provides the elevator design service (see Fig. 18), on the display screen of his building designer user terminal 2.

When the building designer, who has completed the elevator installation drawing data by himself, selects the desired service provided, "cage/doorway artistic design specification study service" 153 from the list of the services provided, while inputting nothing into the case ID input box 155, on the top page of Fig. 18, then, an artistic design specification study page shown in Fig. 31 is opened. On this page, are arranged tools for inputting data required for studying an artistic design specification of an elevator. In detail, on this page, are arranged: a case ID input box 220 for inputting a case ID with which study of artistic design is requested; a building purpose input box 221 for inputting a purpose of a building to be installed with elevators; a floor number input box 222 for inputting the number of floors of the building to be installed with the elevators; an input box 223 for

inputting data (door opening direction and passenger capacity) required for determining a case size etc. of each elevator; a group of icons 224 for selecting a ceiling design pattern; a list box 225 for selecting a side plate material; a list box 226 for selecting a floor material; a check button 228 and a list box 227 for selecting existence or nonexistence of a handrail and its material; a sending button 229; and the like. In this case, however, the case ID input box 220 only is displayed as an inactive box.

In this case, the building designer must input suitable data into the input box 221 – 223 other than the case ID input box 220, and thereafter, select suitable materials from other list boxes 224 – 227 (S2044). Here, the material of the handrail should be selected only if the handrail is to be fitted.

On the other hand, in the case of the building designer who obtains the elevator installation drawing data generated by the equipment designer user terminal 1, when the building designer inputs the case ID into the case ID input box 155 and pushes the return key, then, the text on the WWW page is changed in its style. In detail, in the list of the names of the service provided, on the WWW page of Fig. 18, the service name displayed next to the service name “elevator installation drawing generation service” that corresponds to the inputted case ID and is presently saved, namely, the service name “cage/doorway artistic design specification study service” 153 of the service that the building designer is to receive next is highlighted. By this, the building designer can easily grasp the service to receive first in this access.

Thereafter, when the building designer selects the desired service provided “case/door way artistic design specification study

service" 153 from the list of the services provided, then, a studied information retrieval request, which includes the case ID inputted into the case ID input box 155, is sent to the database server 12 through the WWW server 11. The database server 12 makes a database search using, as a retrieval key, the case ID included in this retrieval request, to take out studied information (purpose of the building, the recommended number of elevators to be installed, recommended passenger capacities of the elevators, and recommended transport speeds of the elevators) from the customer" specification management database, and returns this information (S2042).

An artistic design specification study page shown in Fig. 31 is displayed on the building designer user terminal 2 that has received this return data (the purpose of the building, the recommended number of the elevators to be installed, the recommended passenger capacities of the elevators, and the recommended transport speeds of the elevators). In this case, however, default data (the purpose of the building, the number of the floors, the recommended passenger capacities of the elevators, the recommended transport speeds of the elevators, the door opening directions, and the option data) have been already set into the input boxes 220, 221, 222 and 223 on the page. Thus, it is sufficient that the building designer only selects suitable materials from the list boxes 224 – 227 (S2044). Here, the material of the handrail should be selected only if the handrail is to be fitted.

Now, when the building designer sets the required data and thereafter clicks the sending button 229, on the page of Fig. 32, then, the building designer user terminal 2 judges if a special ceiling design pattern or a special material is included in the data set on the page (S2045).

As a result, when at least a special ceiling design pattern or a special material is included, then, subsequent processing goes to the below-described fifth stage (S205).

On the other hand, when neither a special ceiling design
 5 pattern nor a special material is included, then, a database retrieval request, which includes the set data (the passenger capacity, the door opening direction, the material data, the ceiling pattern, etc.) for each elevator, is sent to the database server 12 through the WWW server 11. Receiving this database retrieval request, the database server 12
 10 searches the artistic design drawing management database for elevator artistic design drawing data and elevator perspective drawing data associated with the data included in the database retrieval request (S2046). And, the retrieval result is returned to the client 2 of the database retrieval request through the WWW server 11. By
 15 this, elevator perspective drawing data 230 included in the return data are displayed graphically as shown in Fig. 32(a), on the page opened on the display screen of the building designer user terminal 2. In addition, a message 231 is displayed for asking the building designer if the data on display and its related information should be
 20 saved, while displaying two underlined letters "Y" and "N" for receiving a reply to the message (S2047).

Here, when the building designer clicks the underlined letter "N" on one side (S2048), the top page (see Fig. 18) is opened again on the display screen of the building designer user terminal 2. When,
 25 however, the other underlined letter "Y" is clicked (S2048), then, a data save request, which includes the data on display and its related information (elevator perspective drawing data, elevator artistic design drawing data, ceiling design pattern, material data, building

information, the number of elevators to be installed, transport speeds, passenger capacities, door opening directions, etc.) is sent to the database server 12 through the WWW server 11. Here, when a case ID has been already assigned to the case in which study of the artistic design is requested this time, then, the case ID is also sent together with the data save request to the database server 12 at this time.

Receiving this data save request, the database server 12 takes out the case ID from the data save request (S2049).

Here, when a case ID can not be taken out from the data save request, then, the elevator artistic design drawing data etc. (studied information relating to the entrusted case) included in the data save request are registered anew into the customer's specification management database, associating them with the youngest case ID among unregistered case ID and the present date. Thereafter, the new case ID registered this time is returned to the building designer user terminal 2 through the WWW server 11 (S40411). By this, a case ID confirmation page 232 as shown in Fig. 32(b) is opened on the display screen of the building designer user terminal 2. This case ID confirmation page displays the new case ID assigned to the case entrusted by the building designer, and an OK button 233 is arranged on the page. When the building designer confirms the new case ID and thereafter clicks the OK button 233, then, the top page of Fig. 18 is displayed again on the display screen of the building designer user terminal 2. And, at the same time, the service name "cage/doorway artistic design study service" of the service provided this time and the new case ID are saved, being associated with each other.

On the other hand, when the case ID can be taken out from the data save request (S4049), then, the database server 12 updates the

database registration date registered in the customer's specification management database being associated with that case ID, into the present date. And, the elevator artistic design drawing data etc. included in the data save request is registered additionally to the studied information registered in association with that case ID in the customer's specification management database (S20410). Thereafter, the database server 12 returns a message that database registration of the elevator artistic design drawing data etc. has been successful, to the client 2 who has entrusted the study of the artistic design, through the WWW server 11 (S20214). On the side of the building designer user terminal 2 that receives this message, the top page of Fig. 18 is opened again on the display screen of the building designer user terminal 2. And, at the same time, the service name "cage/doorway artistic design study service" of the service provided this time and the case ID are saved, being associated with each other.

(5) Fifth stage (S205)

A flowchart of Fig. 33 shows a flow of detailed processing in the first half of this fifth stage (S205).

When, in S2045 of the fourth stage, either a special design pattern or a special material is included in the data set in the artistic design specification study page, then, an artistic design drawing generation request page shown in Fig. 34(a) is opened on the display screen of the building designer user terminal 2. This artistic design drawing generation request page displays confirmatory information 241 for confirmation of the data that have been set to that time, and a sending button 245 for instruction of sending the data on display is arranged on this page. Here, in the neighborhood of the confirmatory information 241a on the special ceiling design pattern or special

material, is arranged a file name input box 242 for inputting a name of a file (hereinafter, referred to as a design information file) for storing data of the special ceiling design patter or special material desired by the building designer. The building designer should input a suitable electronic file name into the file name input box 242. The design information file, whose name is inputted here, stores a image etc. generated by the building designer using a suitable graphics tool. For example, in the case of a design information file for a special ceiling design pattern, it stores a ceiling design image as shown in Fig. 35.

Further, on this artistic design drawing generation request page, is arranged a drawing requisition date input box 243 for inputting a desired dead line (date) for the artistic design drawing. Thus, the building designer should input suitable data also into the drawing requisition date input box 243, before clicking the sending button 245.

When the building designer inputs suitable data into the input blocks 242 and 243 on this artistic design drawing generation request page, and thereafter clicks the sending button 245, then, a data save request, which includes the data on display, is sent to the database server through the WWW server 12 (S2053).

Receiving this data save request, the database server uploads a design information file corresponding to the file name included in the data save request (S2054). Then, the database server registers the other data included in the data save request and the design information file etc. in association with each other into a design information management database, and its data storage location and the case ID are sent to the building designer user terminal 2.

The building designer user terminal 2 sends an artistic design

drawing generation request, which includes the return data, to the management terminal 112 through the WWW server 11. The management terminal 112 first takes out identification information of artistic designers who provide elevator artistic design drawing generation service, from the service management database 116. Further, case IDs and their dead lines corresponding to each piece of identification information obtained this time are taken out from the load database 115. Based on the results, the artistic designer having the least number of cases under his charge is determined as a person to whom plotting of the present artistic design drawing is requested. The dead line of the elevator artistic design drawing data to be requested this time is determined by adding a predetermined working period to the dead line of the last case under the charge of this artistic designer. Then, the management terminal 112 updates the load management database 115 with the result determined this time, and sends the result determined this time and the storage location of the design information file etc. to the WWW server 11.

Receiving the sent data, the WWW server 11 requests the mail server on the network to distribute an e-mail addressed to the person in charge of the artistic design to inform him of the file name and storage location of the design information file, the case ID, and the dead line, and at the same time, sends the case ID and the dead line to the building designer user terminal 2 (S2055).

By this, a dead line answer page shown in Fig. 34(b) is opened on the display screen of the building designer user terminal 2. On this dead line answer page, are displayed the case ID and dead line included in the return data. Further, an OK button 247 is arranged on this dead line answer page. When the building designer

confirms the contents on display and thereafter clicks the OK button 247, then, the top page of Fig. 18 is opened again on the display screen of the building designer user terminal 2.

Flowcharts of Figs. 36 and 37 show a flow of detailed
5 processing in the latter half of this fifth stage.

In the artistic designer user terminal 100 of the artistic designer determined as the person in charge of the artistic design drawing requested this time, processing shown in Fig. 36 is performed when the time determined in his schedule arrives. First, the design
10 information file etc. are taken out from the design information management database (S2057). Product specification information of an interior material indicated by each piece of the material data taken out this time is retrieved from the material database (S2058). Then, elevator interior decoration structure is determined based on the
15 design information file etc. and the product specification information. Further, based on this result determined, elevator artistic design drawing data and elevator perspective drawing data are generated (S2060). Thus-obtained elevator artistic design drawing data and elevator perspective drawing data are registered into the artistic
20 design drawing management database (S2061). Then, detailed data that have been determined in the above-mentioned processes are registered as studied information additionally into the customer's specification management database. And, the mail server on the network is requested to distribute an e-mail addressed to the client to
25 inform him of the case ID of the artistic design drawing generation request and the storage location of the elevator artistic design drawing data etc.

When the building designer knows the completion of the

205220-426900T

elevator artistic design drawing data etc. by means of an arrival of the e-mail, then the building designer starts up again the browser on his building designer user terminal 2 to download the elevator artistic design drawing data etc., to establish connection between his building designer user terminal 2 and the WWW server 12, and to open an artistic design drawing download page as shown in Fig. 29(a) on the display screen of his building designer user terminal 2. On this artistic design drawing download page, are arranged a case input box 210 for inputting the case ID of the request for generation of the artistic design drawing that he wishes to download, and a sending button 211 for instruction of sending the case ID of the request for generation of the drawing. When the building designer inputs the artistic design drawing generation request case ID that he knows from the e-mail, into the case input box 210 and thereafter clicks the sending button 211 (S2063), then, a page as shown in Fig. 29(b) is opened. On this page, is arranged an underlined character string 212 for instructing download of the elevator artistic design drawing data. When the building designer clicks this character string 212, then, an artistic design drawing retrieval request, which includes the artistic design drawing generation request case ID, is sent to the database server 12 through the WWW server 11. Correspondingly, the database server 12 takes out the elevator artistic design drawing data etc. associated with the artistic design drawing generation request case ID from the artistic design drawing management database (S2064). Then, the elevator artistic design drawing data is downloaded to the building designer user terminal 2 (S2065).

Thereafter, when it is desired to change the elevator artistic design drawing data on the side of the building designer, then, it is

sufficient that the building designer opens the artistic design specification study page on his user terminal 2, inputs the case ID on this page, and sets data again. By this, the user terminal 100 of the artistic designer in charge calculates difference between the data set
5 last time and the data set this time, and corrects the artistic design drawing data based on the difference. Accordingly, on the side of the artistic designer, the corrected artistic design drawing data can be made more promptly than the case where the artistic design drawing data is generated from the beginning, and on the side of the building
10 designer, the corrected artistic design drawing data can be obtained promptly.

The relation between the building designer and the artistic designer is almost similar to the above-described relation between the building designer and the equipment designer. Thus, according to
15 this extended system, the building designer user terminal and the artistic designer user terminal exchange data through databases, and such arrangement absorbs a time lag that may occur between the progress of the design work on the side of the building designer and the progress of the artistic design drawing work on the side of the
20 artistic designer.

Further, a present state of load of each artistic designer is managed, and a new artistic design drawing generation request is entrusted to the artistic designer who has the lightest load at present. Such arrangement gives advantages to the building designer's side by
25 shortening his waiting time between a request and completion of an artistic design drawing, and to the artistic designer's side by improving overall working efficiency caused by leveling of his loads.

In the above description, an elevator is taken as an example of

an order-made product. Of course, however, an incidental facility other than an elevator may be taken as an order-made product.

Further, by allowing download of a program that defines the processing performed on the user terminal on the equipment
5 designer's side, installation drawing data can be generated on the user terminal on the side of the building designer also. Of course, it is possible to say similarly, when a program that defines the processing performed on the user terminal on the equipment designer's side is installed onto the user terminal on the building designer's side, from a
10 storage medium that stores the program.

According to the present invention, check of interference between an order-made product and peripheral equipment can be performed accurately and promptly by calculation processing. Thus, it is possible to generate promptly an installation structure plan that
15 can appropriately install an order-made product into a building under design. Owing to this, the building designer is given (1) an advantage that installation structure for equipment is grasped early and thereby a design period is shortened, and the equipment designer (2) an advantage that processing of generating an equipment installation
20 drawing according to building structure is abbreviated and simplified.

Further, in connection study, i.e., in studying if equipment can be housed in a building's main frame, the building designer can ascertain at a glance if the equipment satisfying requirements specification interferes with surrounding building elements. Thus,
25 connection study can be performed more promptly and simply, which also shortens a period that elapses until the building designer obtains the installation structure plan.

Further, according to the present invention, a series of

transaction procedures between a person who gives an order of an elevator and a person who receives the order can be performed through a network.

5

Industrial Applicability

The present invention is useful in that an elevator specification can be easily determined through a network etc. and in that consistency between the elevator in question and design and specification of a building to be installed with the elevator can be adjusted promptly.

10

205220 " 426900F

Claims

1 1. A remote order acceptance design system, comprising:
2 a database that stores CAD symbols each including effective space
3 information expressing an occupied space occupied by a product;
4 a first input receiving means for receiving input of a requirements
5 specification of an order-made product that includes one or more equipments;
6 a data taking means for determining the occupied space of said
7 order-made product based on the requirements specification whose input is
8 received by said first input receiving means, and for taking out a CAD symbol
9 that includes effective space information conforming to said occupied space,
10 from said database; and
11 a data output means for outputting the CAD symbol taken out by said
12 data taking means to an input source who has inputted the requirements
13 specification of said order-made product.

1 2. The remote order acceptance design system according to Claim 1,
2 wherein:
3 said system further comprises a CAD symbol automatic generation
4 means for generating a CAD symbol of said order-made product based on the
5 requirements specification received by said input receiving means, when said
6 CAD symbol can not taken out from said database; and
7 said data output means outputs the CAD symbol generated by said
8 CAD symbol automatic generation means, when said CAD symbol can not be
9 taken out from said database.

1 3. The remote order acceptance design system according to Claim 1,
2 wherein:

3 said system further comprises:

4 a product specification database that stores one or more pieces of
5 location rule information expressing location rules of the equipments included
6 in the product;

7 a second input receiving means for receiving input of building data
8 that include a CAD symbol of said order-made product;

9 a structural features extracting means for extracting structural
10 features within the occupied space expressed by the effective space information
11 of the CAD symbol of said order-made product from the building data received
12 by said second input receiving means, and for judging existence of interference
13 in an installation area of said order-made product, based on said structural
14 features; and

15 an installation drawing generation means for taking out the location
16 rule information corresponding to said CAD symbol from said product
17 specification database, when it is judged that interference does not occur in the
18 installation area of said order-made product, and for generating installation
19 drawing data for said order-made product based on said location rule
20 information and said building data;

21 and

22 said data output means outputs the installation drawing data
23 generated by said installation drawing generation means to an input source
24 who has inputted said building data, when said second input receiving means
25 receives the building data.

1 4. The remote order acceptance design system according to Claim 2,
2 wherein:

3 said system further comprises:

4 a product specification database that stores one or more pieces of

5 location rule information expressing location rules of the equipments included
6 in the product;

7 a second input receiving means for receiving input of building data
8 that include a CAD symbol of said order-made product;

9 a structural features extracting means for extracting structural
10 features within the occupied space expressed by the effective space information
11 of the CAD symbol of said order-made product from the building data received
12 by said second input receiving means, and for judging existence of interference
13 in an installation area of said order-made product, based on said structural
14 features; and

15 an installation drawing generation means for taking out the location
16 rule information corresponding to said CAD symbol from said product
17 specification database, when it is judged that interference does not occur in the
18 installation area of said order-made product, and for generating installation
19 drawing data for said order-made product based on said location rule
20 information and said building data;

21 and

22 said data output means outputs the installation drawing data
23 generated by said installation drawing generation means to an input source
24 who has inputted said building data, when said second input receiving means
25 receives the building data.

1 5. The remote order acceptance design system according to Claim 3,
2 wherein:

3 said system further comprises:

4 a building data save means for saving the building data received by
5 said second input receiving means, associating said building data with the
6 input source of the building data; and

7 a correction management means for calculating difference between
8 building data after a change and building data before the change, when said
9 second input receiving means receives the building data after the change, and
10 for judging existence of interference in the order-made product's installation
11 area defined by said building data after the change, based on said difference;
12 and

13 said installation drawing generation means generates installation
14 drawing data of said order-made product based on said location rule
15 information and said building data after the change, when it is judged that
16 interference does not occur in said order-made product's installation area
17 defined in the building data after the change.

1 6. A storage medium that stores a program for making an information
2 processing unit perform design processing, wherein:

3 said program makes said information processing unit perform:

4 structural features extracting processing, in which structural
5 features in an occupied space expressed by effective space information included
6 in a CAD symbol of an order-made product that includes one or more
7 equipments, are extracted from building data; and

8 installation drawing generation processing, in which location rule
9 information corresponding to said CAD symbol is taken out from a product
10 specification database, when it is judged that interference does not occur in an
11 installation area of said order-made product, based on a result of said
12 structural features extracting processing, and installation drawing data of said
13 order-made product are generated based on said building data and equipments
14 location rules expressed by said location rule information.

1 7. An elevator remote order acceptance method, in which a computer

2 distributes an elevator installation drawing to a user terminal through a
3 network, wherein:

4 said method comprises a procedure of making said computer complete
5 said elevator installation drawing step by step, based on data given
6 sequentially from said user terminal; and

7 said procedure comprises one of steps mentioned below, or comprises
8 two or more of said steps in a order mentioned below: namely,

9 a step in which, when said computer receives input of building
10 information relating to a building to be installed with elevators, through a
11 network, then, machine types and number of elevators to be installed, which
12 correspond to said building information, are returned to an input source who
13 has inputted said building information;

14 a step in which, when said computer receives input of a requirements
15 specification for said elevators, through the network, then, a CAD symbol
16 conforming to said requirements specification is returned to an input source
17 who has inputted said requirements specification; and

18 a step in which, when said computer receives input of building data,
19 which include said CAD symbol, through the network, then, the elevator
20 installation drawing based on said building data is returned to an input source
21 who has inputted said building data.

1 8. The elevator remote order acceptance method according to Claim 7,
2 wherein:

3 said procedure further comprises:

4 a step in which, when said computer receives input of a requirements
5 specification relating to artistic design of interior parts of said elevators, then,
6 an artistic design drawing corresponding to said requirements specification is
7 returned to an input source who has inputted said requirements specification.

1 9. The elevator remote order acceptance method according to Claim 7,
2 wherein:

3 in at least one of said steps, information including input data and
4 return data in the step in question is saved under control of said computer, and
5 identification information for using said saved information in a next step is
6 returned together with said return data; and

7 when said computer receives said identification information, said
8 computer uses past input data and return data associated to said identification
9 information, as input data to the next step.

1 10. An elevator remote order acceptance method, in which a computer
2 distributes an elevator installation drawing to a user terminal through a
3 network, wherein:

4 said method comprises a procedure of making said computer complete
5 said elevator installation drawing step by step, based on data given
6 sequentially from said user terminal; and

7 said procedure comprises one of steps mentioned below, or comprises
8 two or more of said steps in a order mentioned below: namely,

9 a step in which, when said computer receives input of building
10 information relating to a building to be installed with elevators, through a
11 network, then, information on at least machine types of the elevators, which
12 correspond to said building information, is returned to an input source who has
13 inputted said building information;

14 a step in which, when said computer receives input of a requirements
15 specification for said elevators, through the network, then, a CAD symbol
16 conforming to said requirements specification is returned to an input source
17 who has inputted said requirements specification; and

18 a step in which, when said computer receives input of building data,

- 19 which include said CAD symbol, through the network, then, the elevator
20 installation drawing based on said building data is returned to an input source
21 who has inputted said building data.

205220 426900

Abstract

A specification plan of an order-made product suitable for a building structure plan is generated promptly.

5 A WWW server 11 and a database server 12 are provided to the equipment designer's side. The database server 12 has a drawing database 9 that registers a CAD symbol for each product. A CAD symbol for each product includes: effective space information, which expresses a space to be secured for installation of the product; product name information expressing a name of the product; structure information expressing structural features (size, shape,
10 etc.); product specification information; option data; etc. On the other hand, WWW server 11 has a symbol generation data interface 3, through which requirements specification data for an order-made product can be received from a WWW client terminal 2, and a CAD symbol of the order-made product can be taken out from the side of the WWW client terminal.

FIG.1

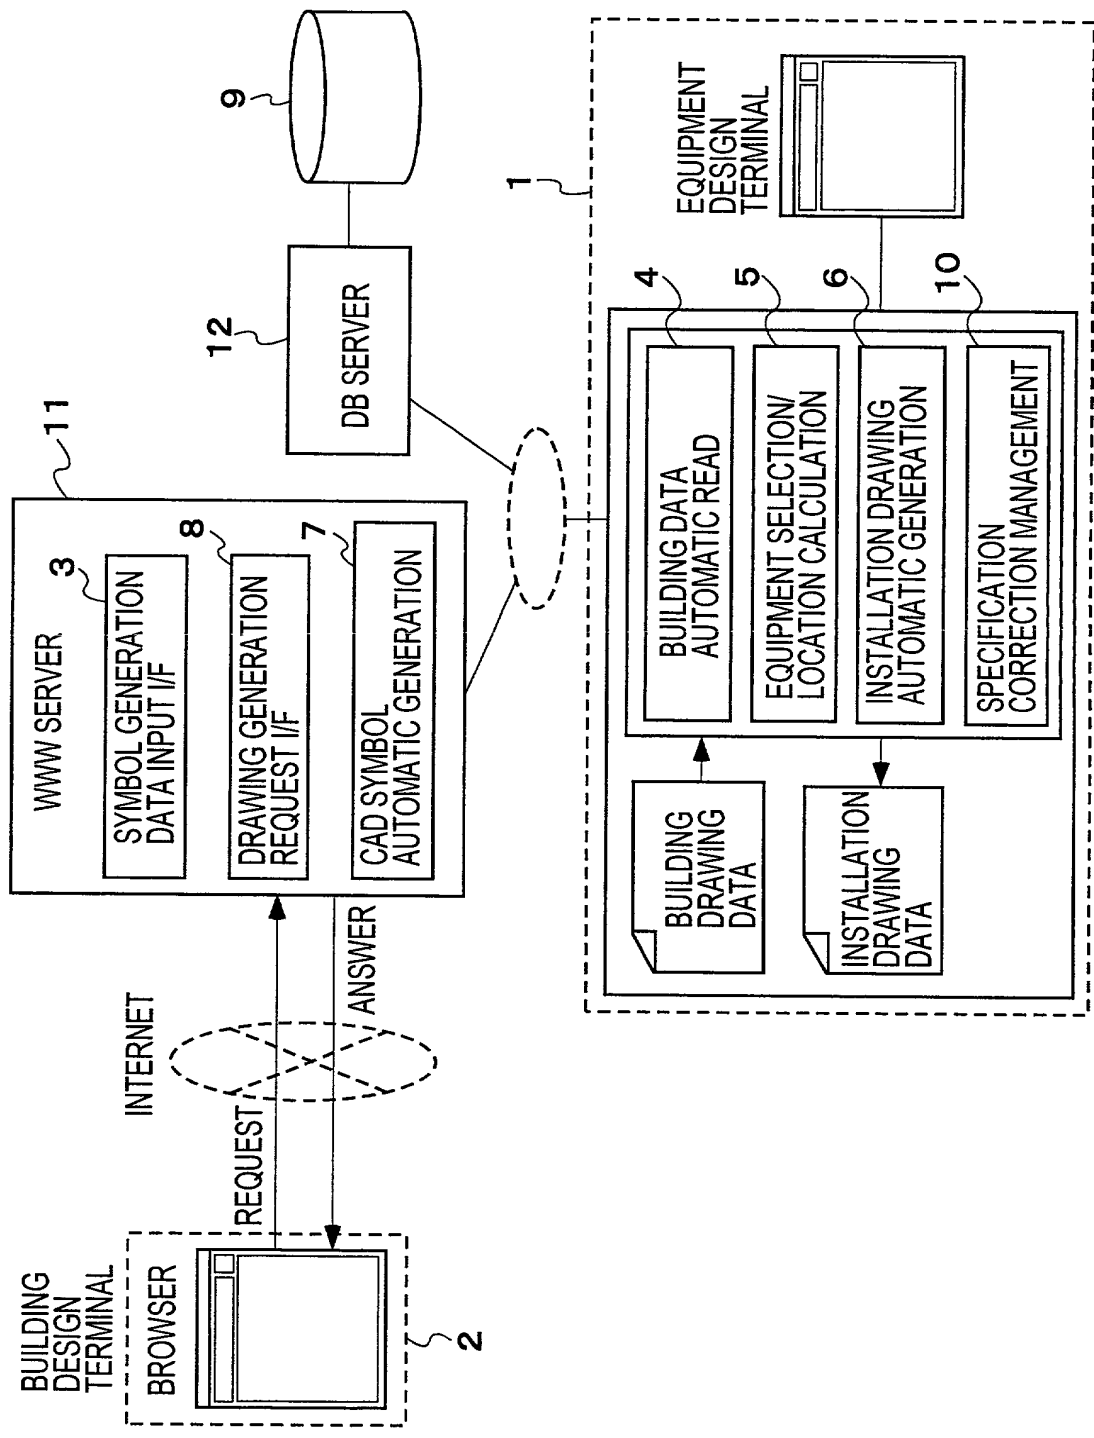


FIG.2


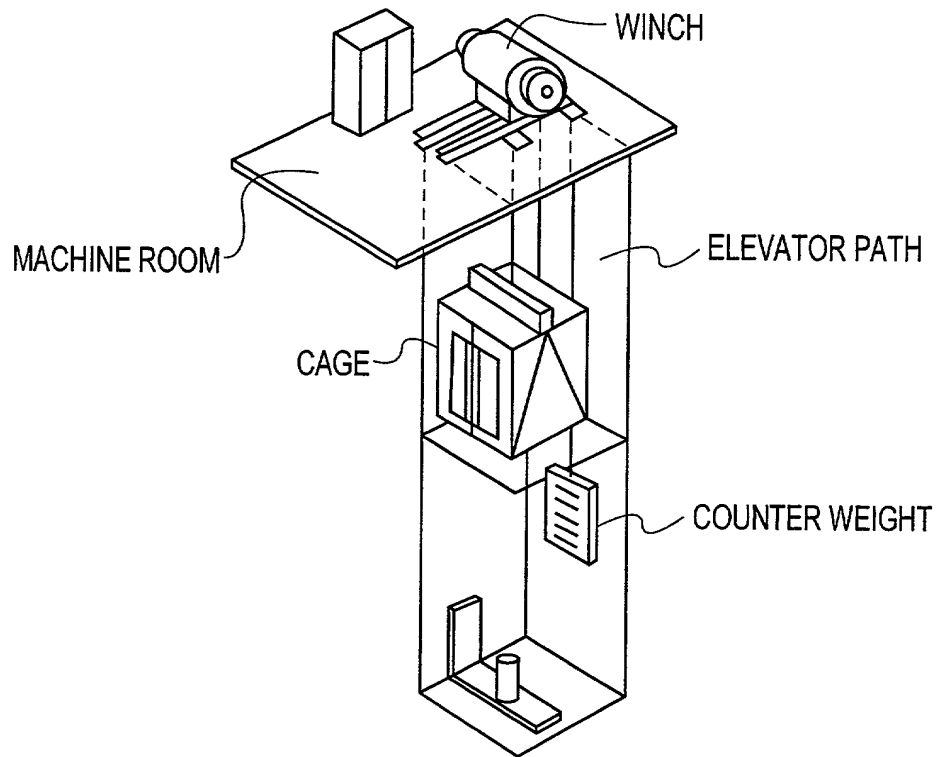
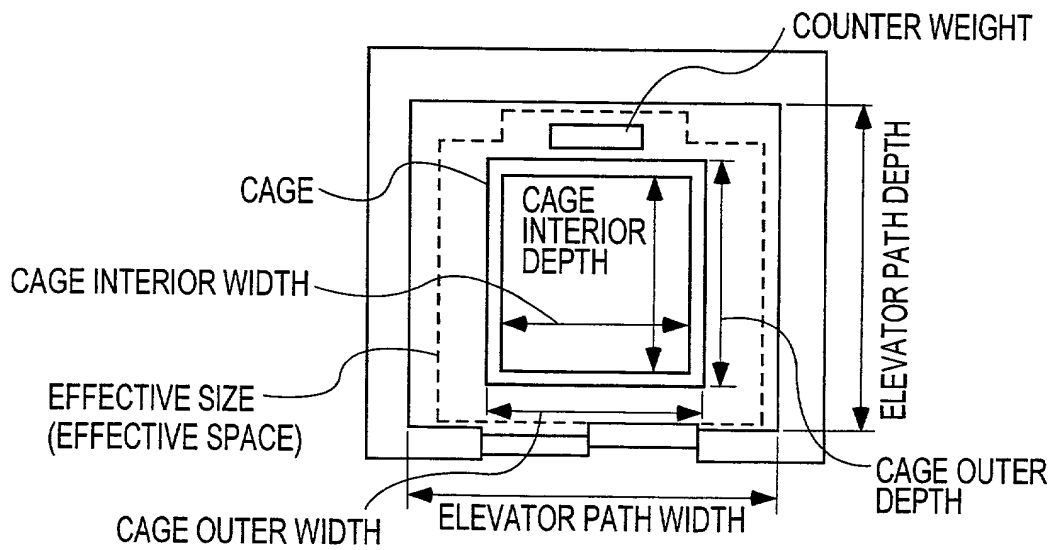
ELEVATOR PATH PLANE

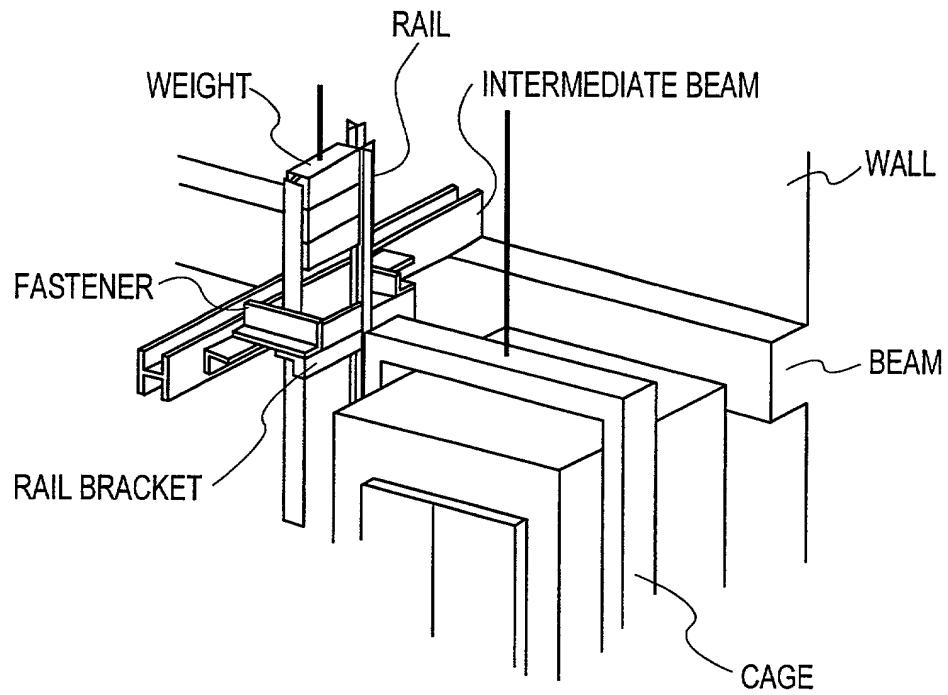FIG.3



EXAMPLE OF FIXING STRUCTURE

FIG.4

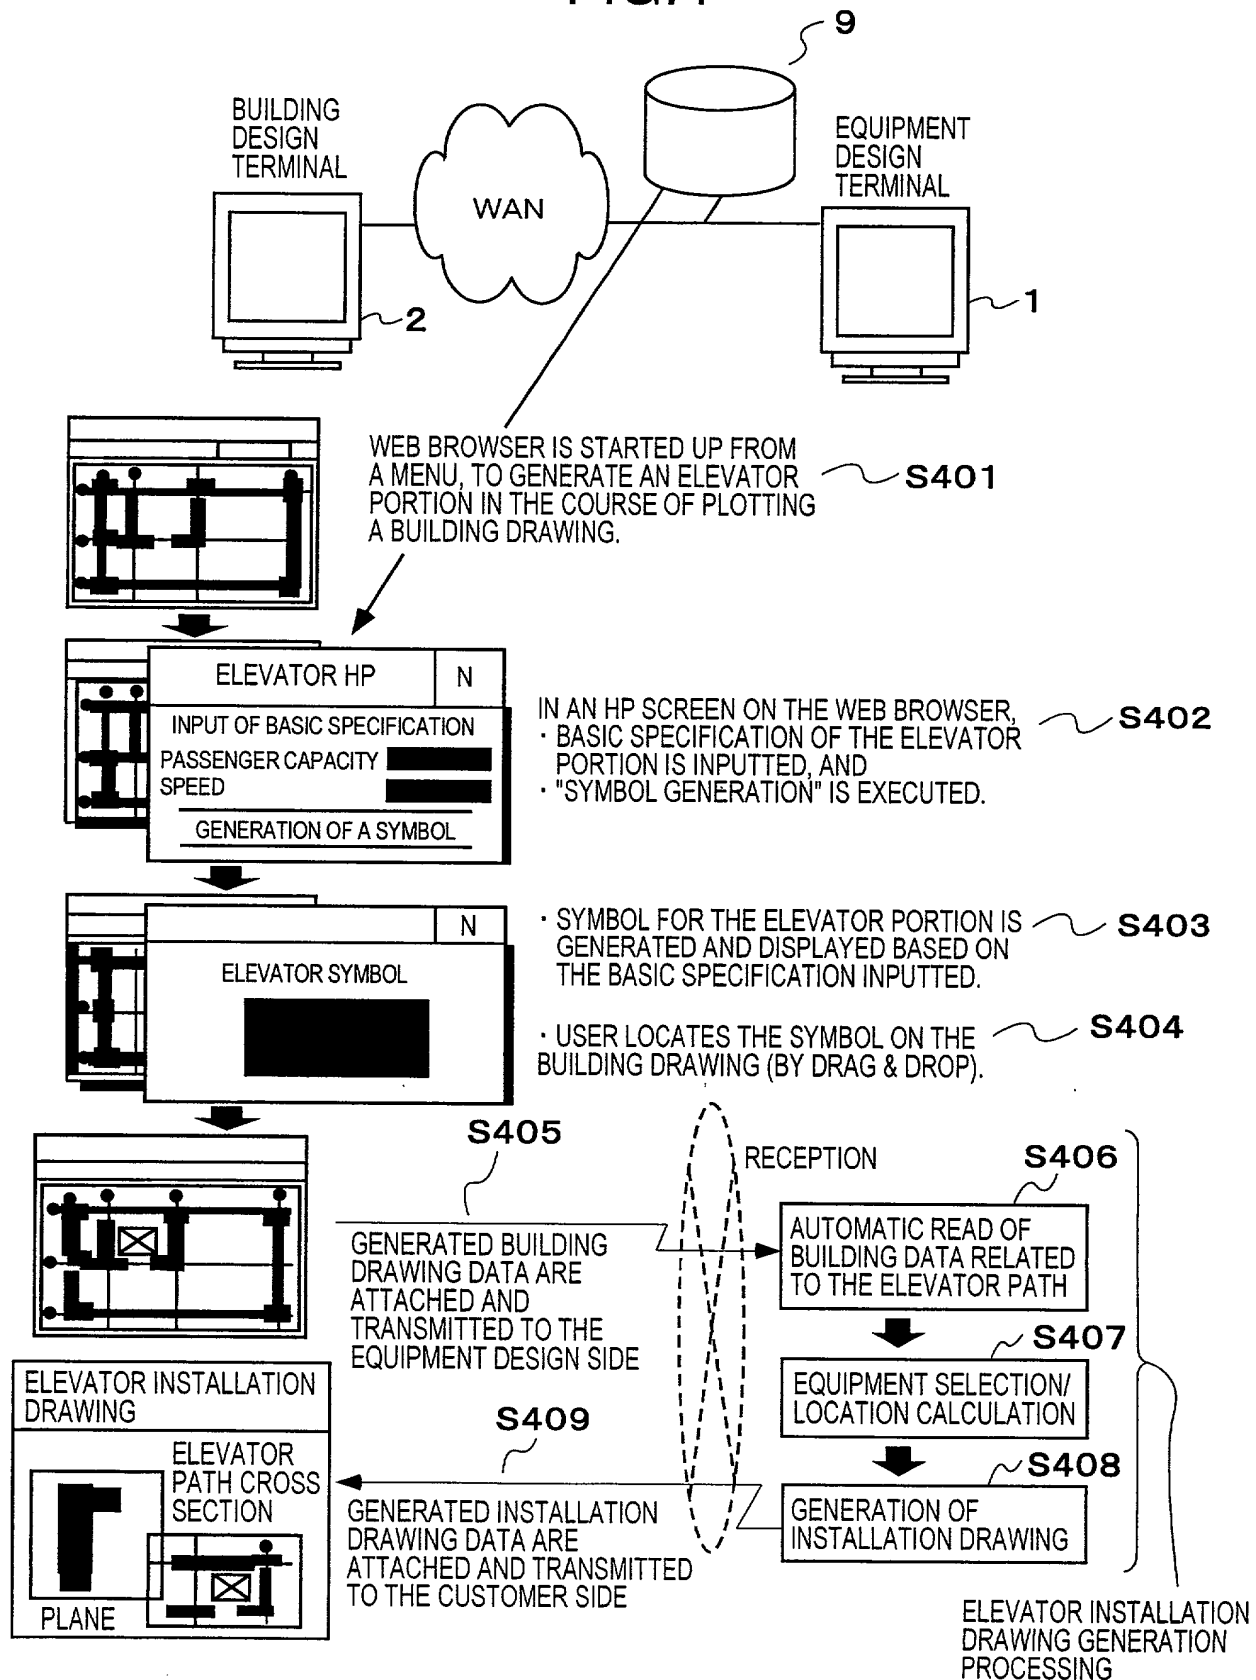


FIG. 5

PURPOSE OF ELEVATOR

1ST ELEVATOR

2ND ELEVATOR

3RD ELEVATOR

4TH ELEVATOR

5TH ELEVATOR

No.

10

—

—

—

—

—

DOOR OPENING DIRECTION

CENTER OPENING

—

—

—

—

—

YOU CAN AVAIL OF A CAD SYMBOL SHOWING A SPACE OCCUPIED BY ELEVATORS.

PLEASE SELECT BASIC SPECIFICATION FOR AN ELEVATOR, AND CLICK THE "SYMBOL DISPLAY" BUTTON. SELECTION OF "PURPOSE OF ELEVATOR" SHOWS A LIST OF SPECIFICATIONS BELOW. PLEASE CONFIRM CAPACITY AND SPEED BEFORE SELECTING "NO."

50

51

52

53

54

No.	CAPACITY		SPEED [m/min]
	PASSENGER [PERSONS]	LOAD [kg]	
1	6	450	45
2			60
3	9	600	45
4			60
5			90
6			105
7	11	750	45
8			60
9			90
10			105
11	13	900	45
12			60
13			90
14			105
15	15	1000	45
16			60
17			90
18			105

FIG.6

YOU CAN AVAIL OF A CAD SYMBOL SHOWING A SPACE OCCUPIED BY ELEVATORS.

PLEASE SELECT BASIC SPECIFICATION FOR AN ELEVATOR, AND CLICK THE "SYMBOL DISPLAY" BUTTON. SELECTION OF "PURPOSE OF ELEVATOR" SHOWS A LIST OF SPECIFICATIONS BELOW. PLEASE CONFIRM CAPACITY AND SPEED BEFORE SELECTING "NO."

SYMBOL DISPLAY

	PURPOSE OF ELEVATOR	No.	DOOR OPENING DIRECTION
1ST ELEVATOR	PASSENGER	10	CENTER OPENING
2ND ELEVATOR			
3RD ELEVATOR			
4TH ELEVATOR			
5TH ELEVATOR			

PASSENGER/LOAD: 11 PASSENGERS/750 kg
SPEED : 105m/min

The diagram illustrates the layout of an elevator shaft. It shows a central rectangular area with a dashed border. The overall width of the shaft is 1860 units, and the overall height is 1800 units. The central area has a width of 1400 units and a height of 1350 units. The door opening direction is indicated by a dashed line and an arrow pointing to the right, with a dimension of 800 units.

FIG.7

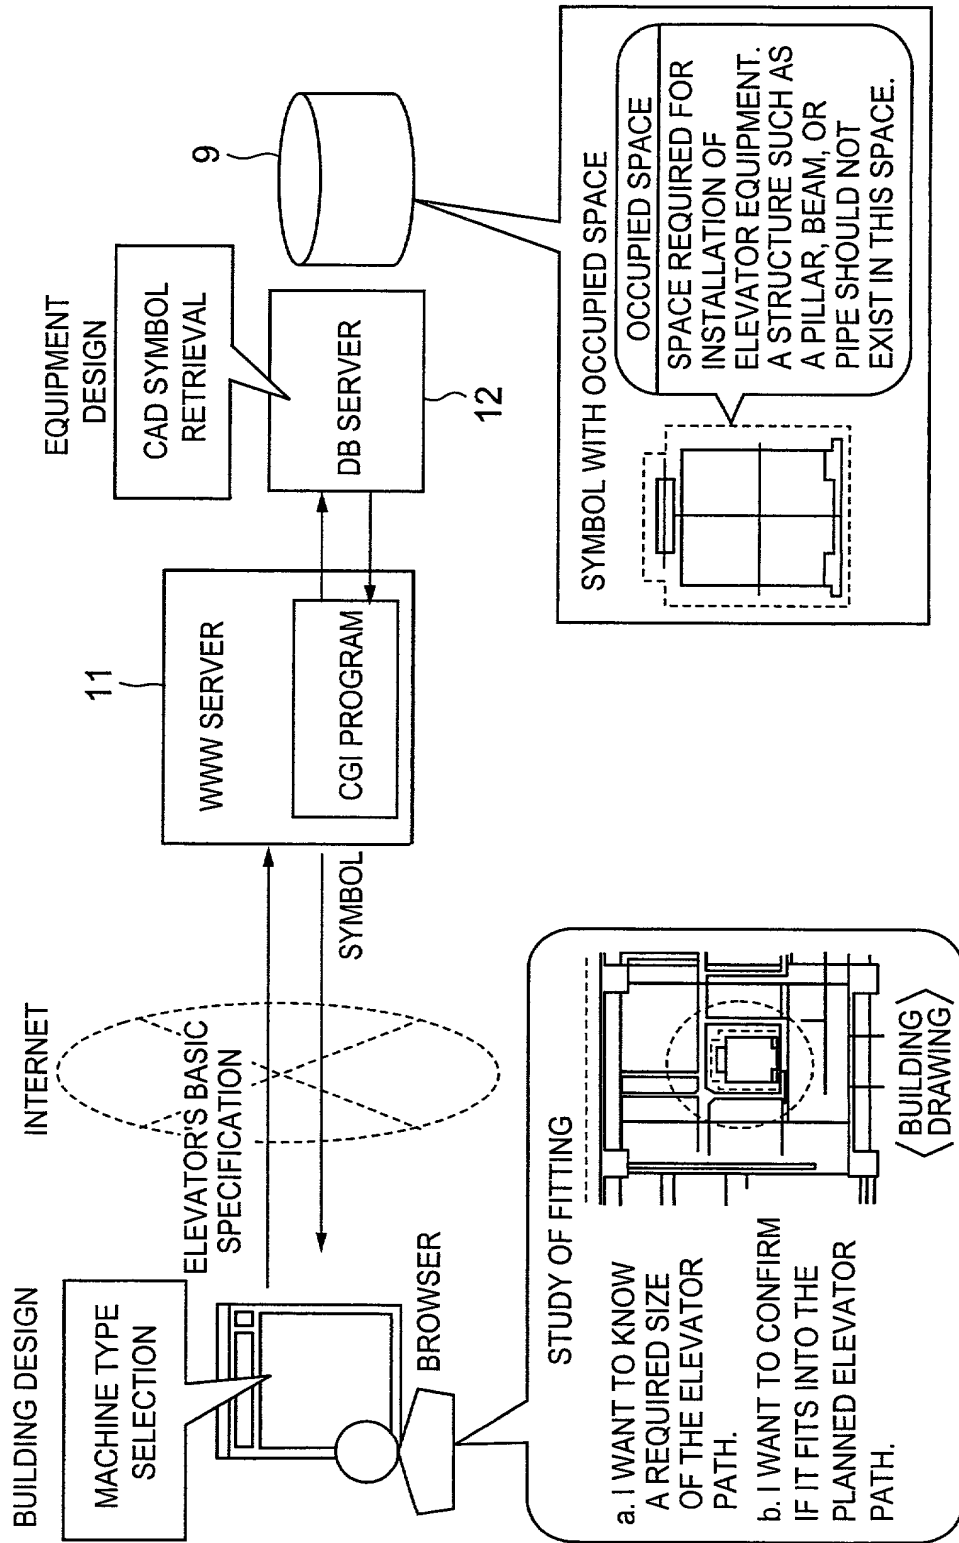


FIG.8

RECEPTION OF REQUEST

BUILDING DESIGN

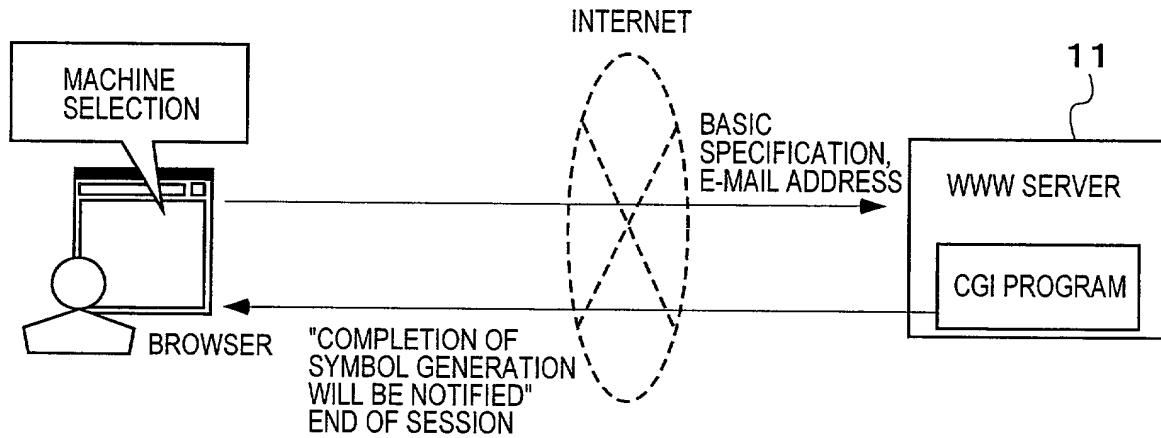


FIG.9

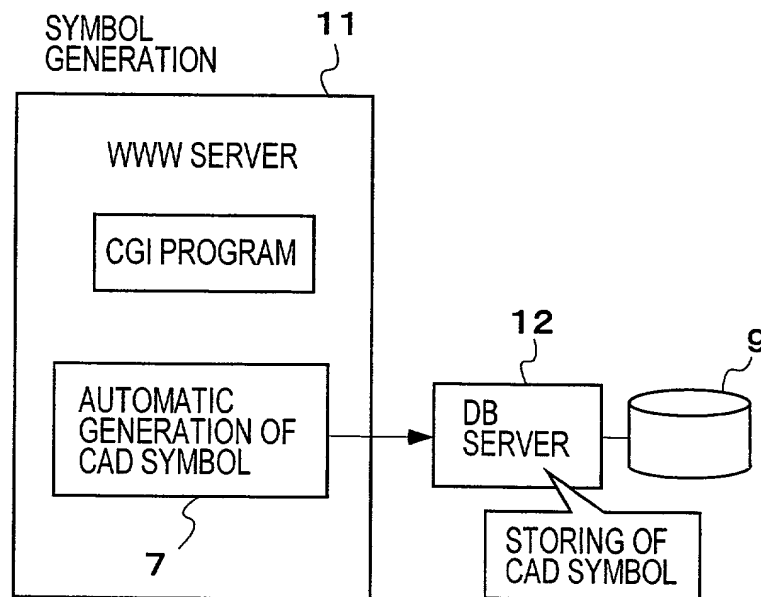


FIG.10


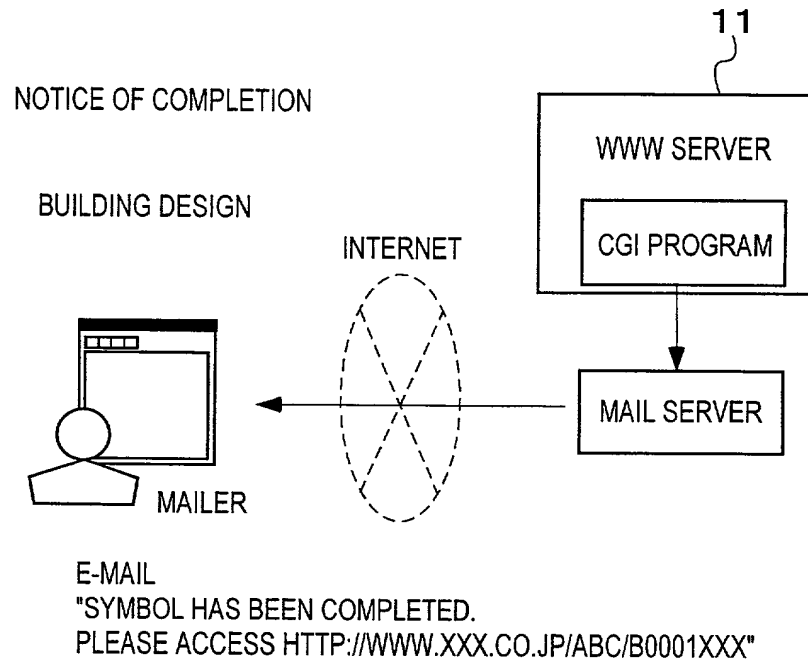



FIG.11

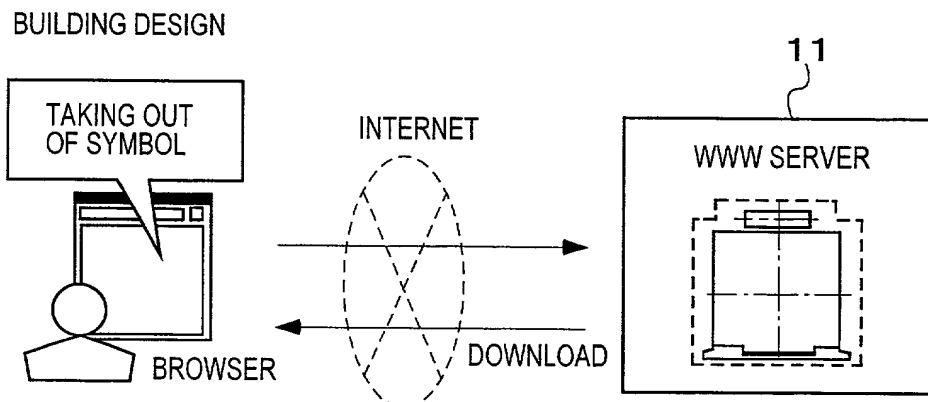TAKING OUT OF SYMBOL



10/35

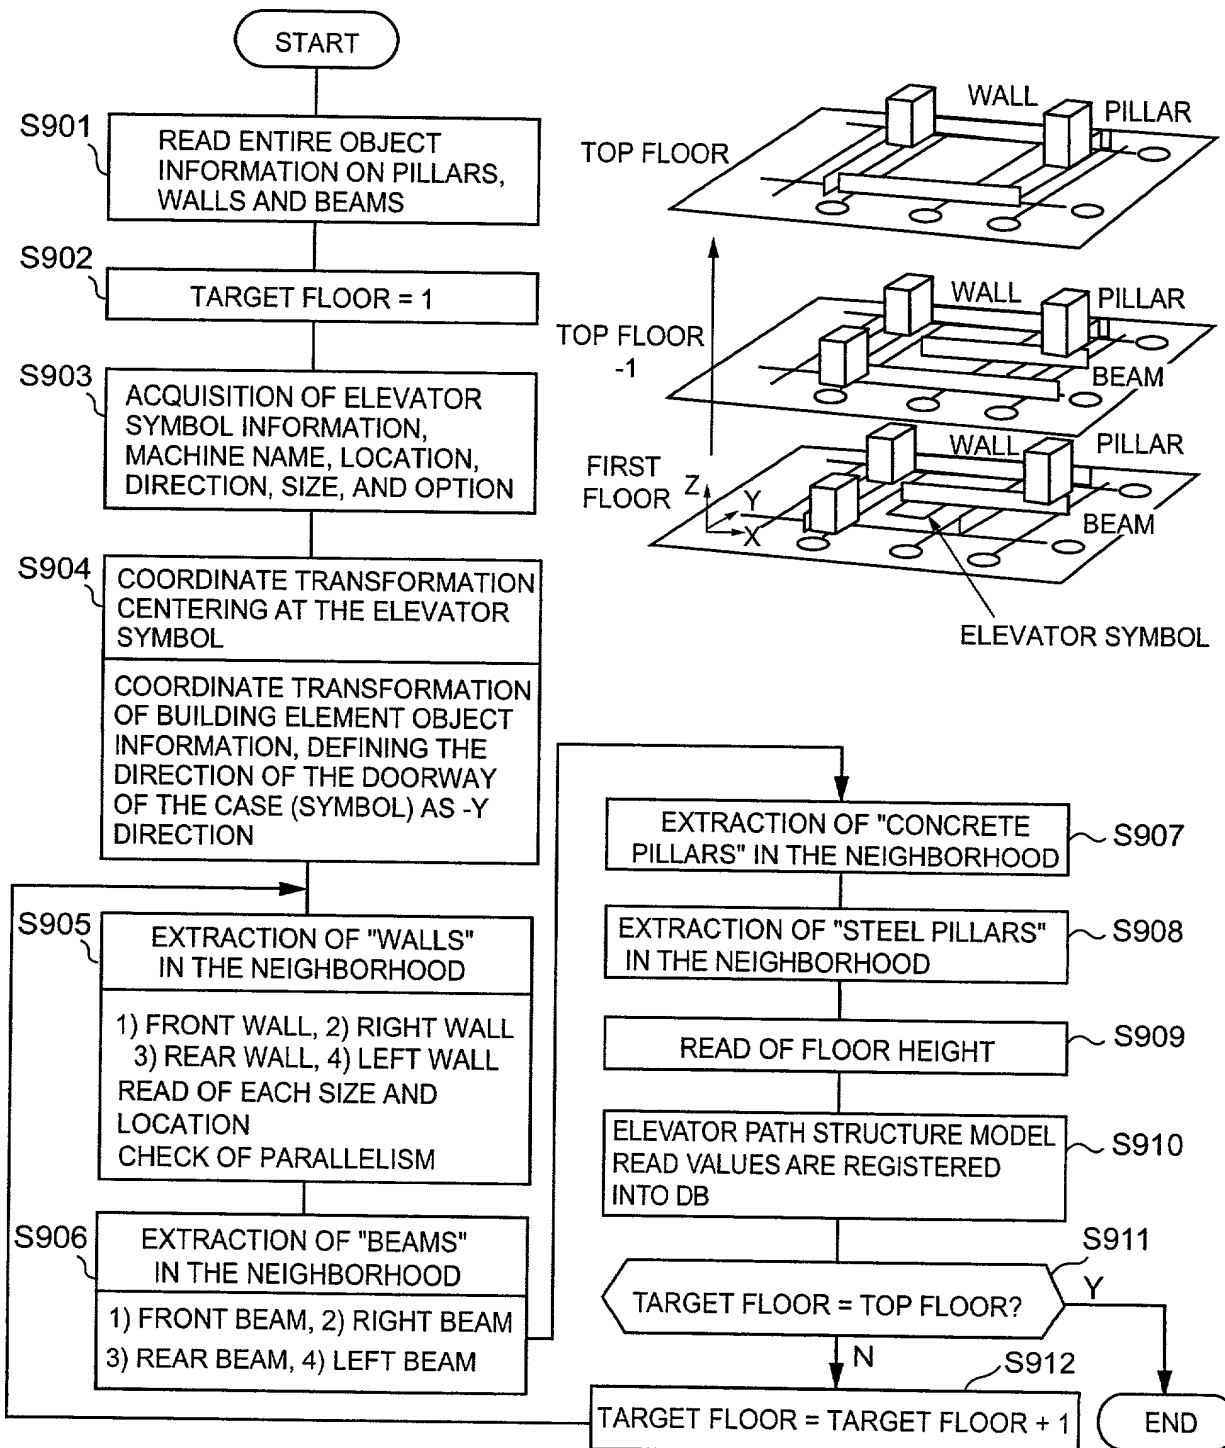FIG.12



11/35

FIG.13

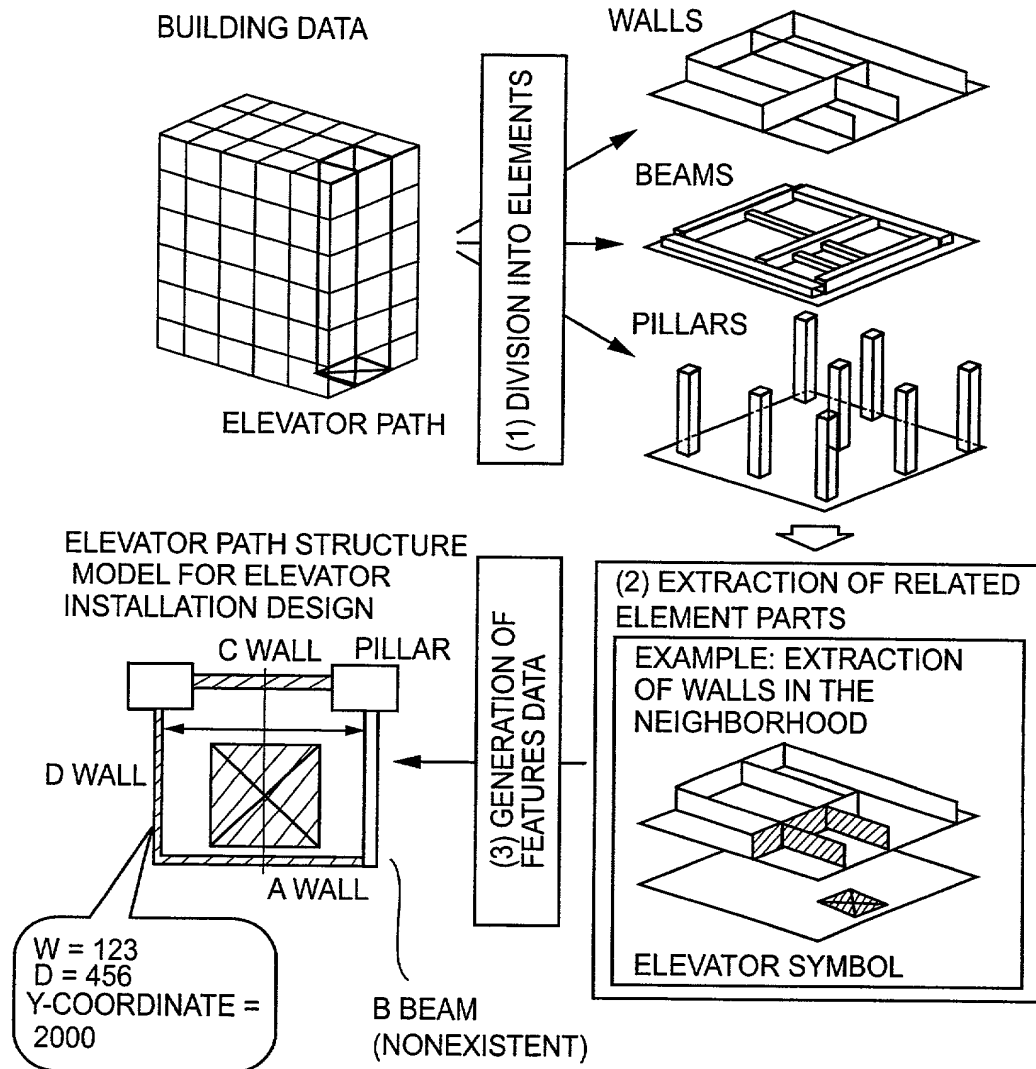


FIG.14


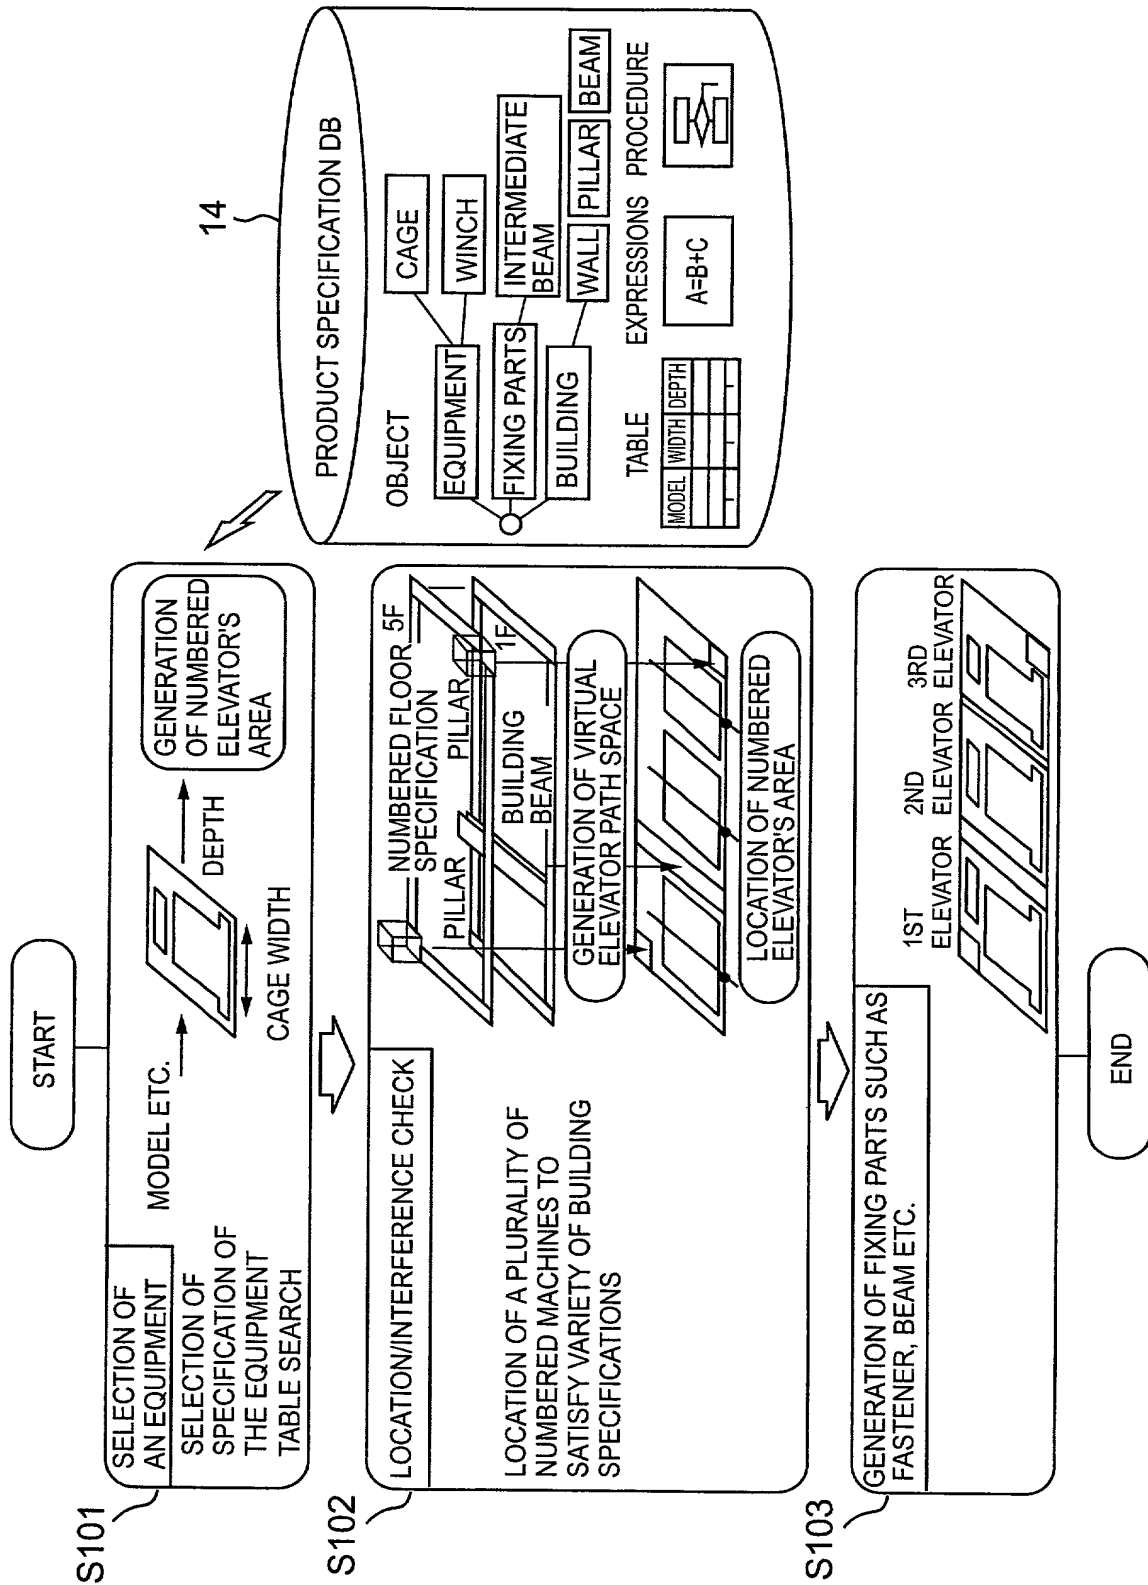


FIG.15

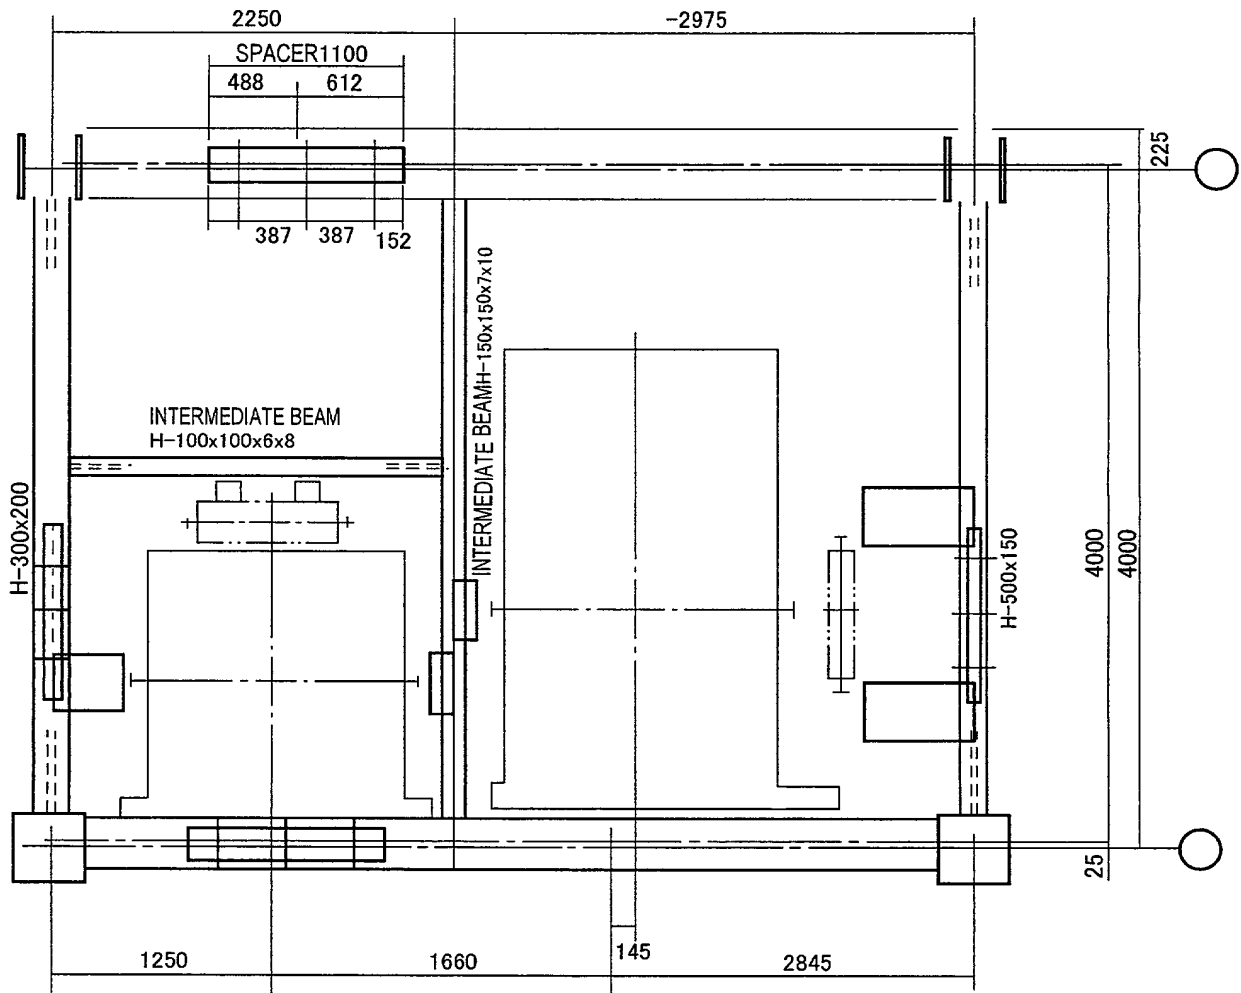

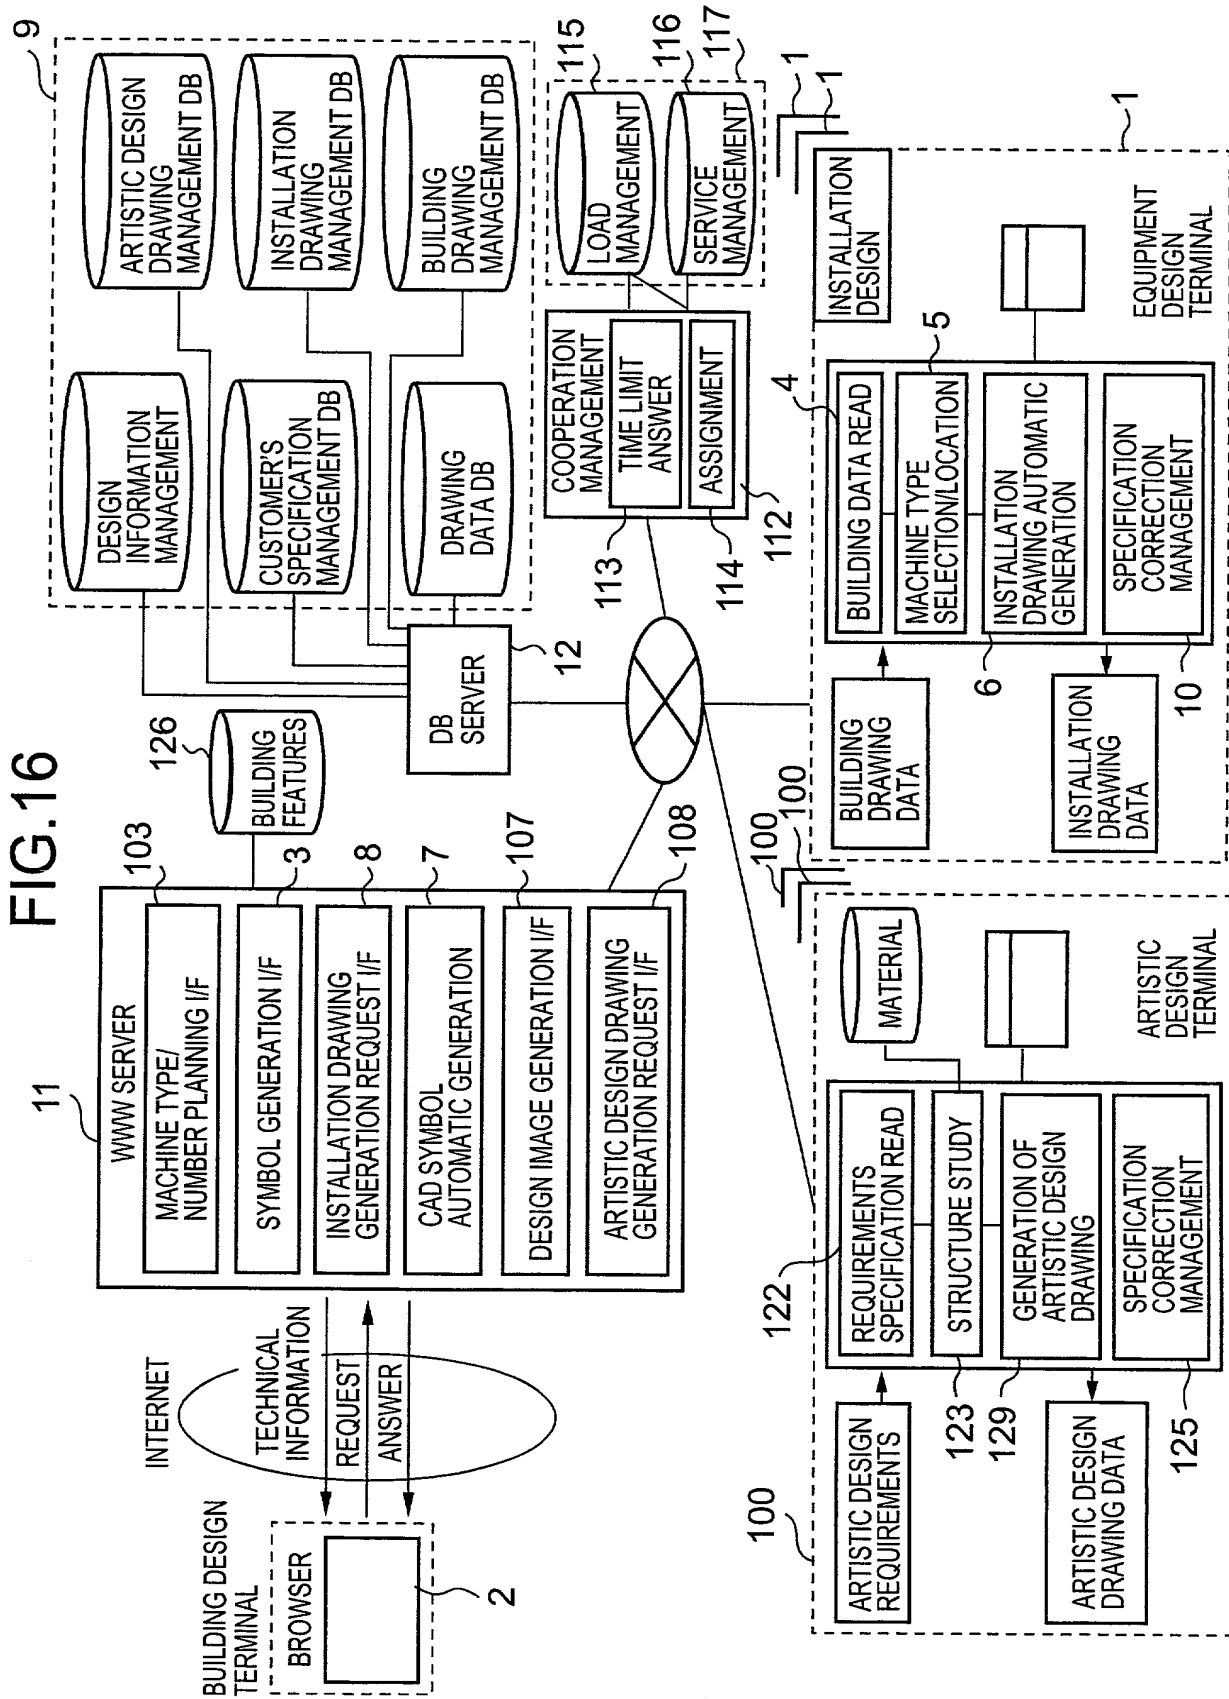


FIG.17

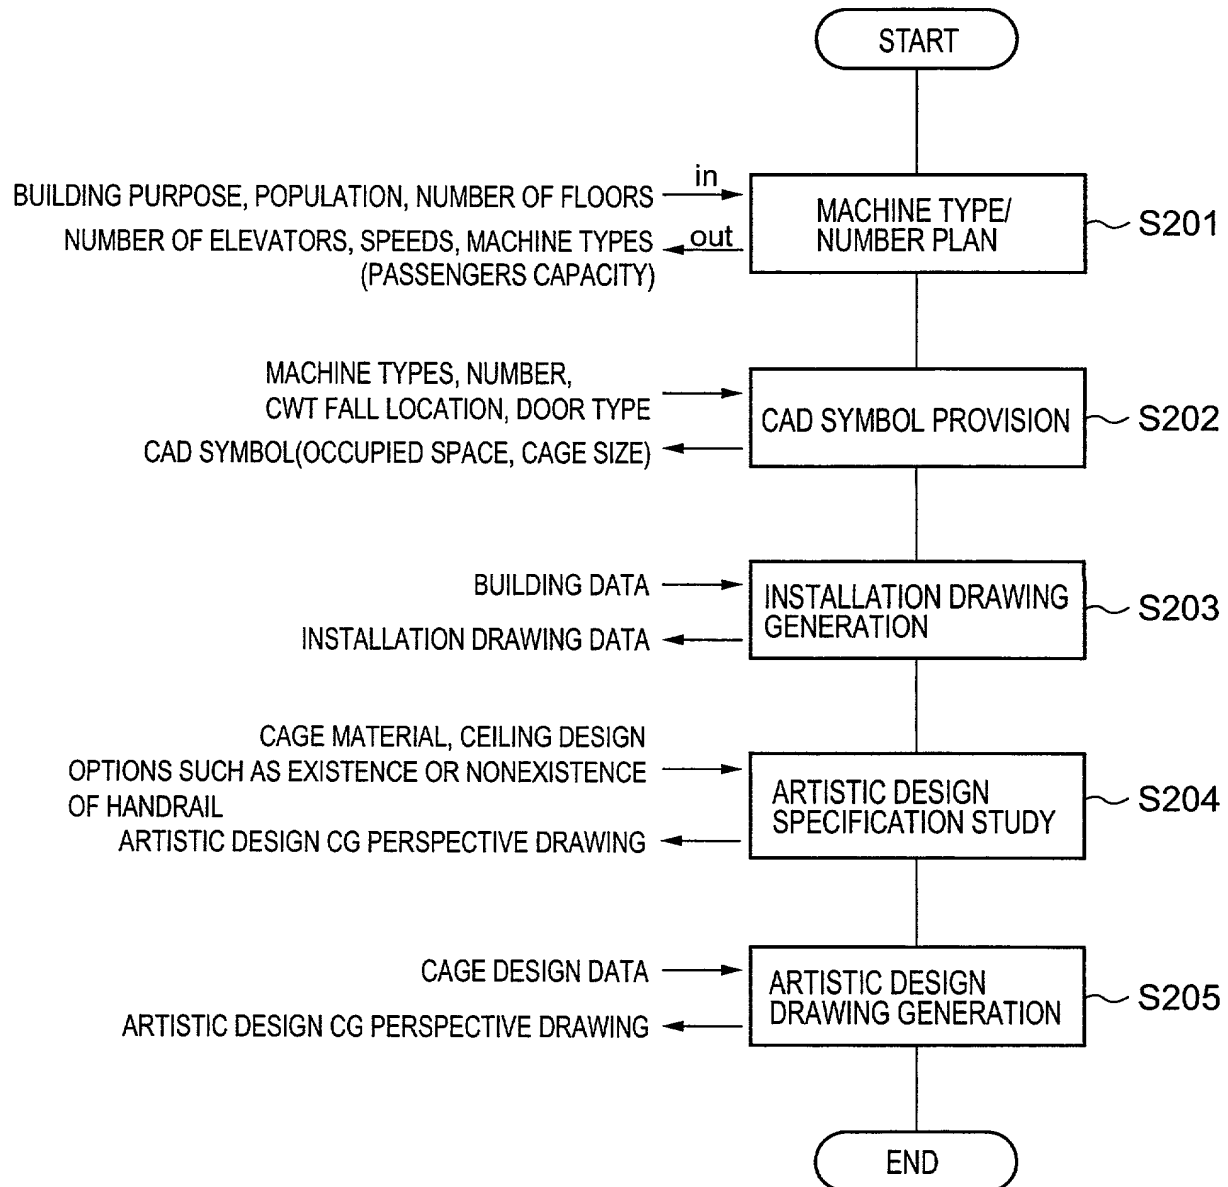


FIG. 18

AA HOME | SEARCH |

HOME PAGE FOR BUILDING DESIGN FIRM

CASE ID : 155

150 ~ ■ MACHINE TYPE/NUMBER PLANNING SERVICE

151 ~ ■ ELEVATOR CAD SYMBOL PROVISION SERVICE
PROVIDES FILES FOR CONFIRMING AND STUDYING SIZES REQUIRED FOR FITTING INTO AN ELEVATOR PATH, ON YOUR BROWSER AND ON A CAD DRAWING.

152 ~ ■ ELEVATOR INSTALLATION DRAWING GENERATION SERVICE
GENERATES AN ELEVATOR INSTALLATION STUDY DRAWING THAT IS THE BEST MATCH FOR A ELEVATOR PATH LOCATION DEFINED IN A MEMBER CUSTOMER'S BUILDING DRAWING PLAN.

153 ~ ■ CAGE & DOORWAY ARTISTIC DESIGN SPECIFICATION STUDY/ARTISTIC DESIGN DRAWING GENERATION SERVICE

FIG.19

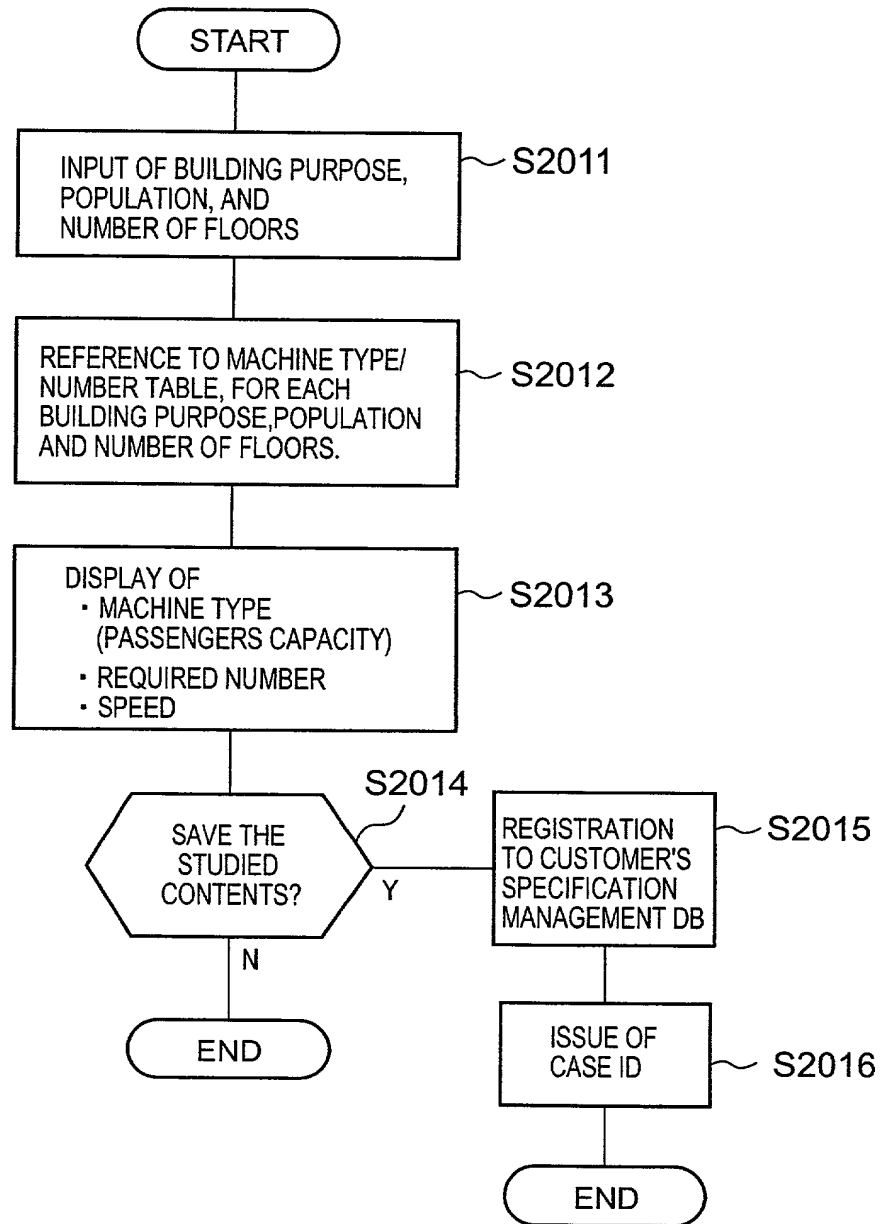


FIG.20

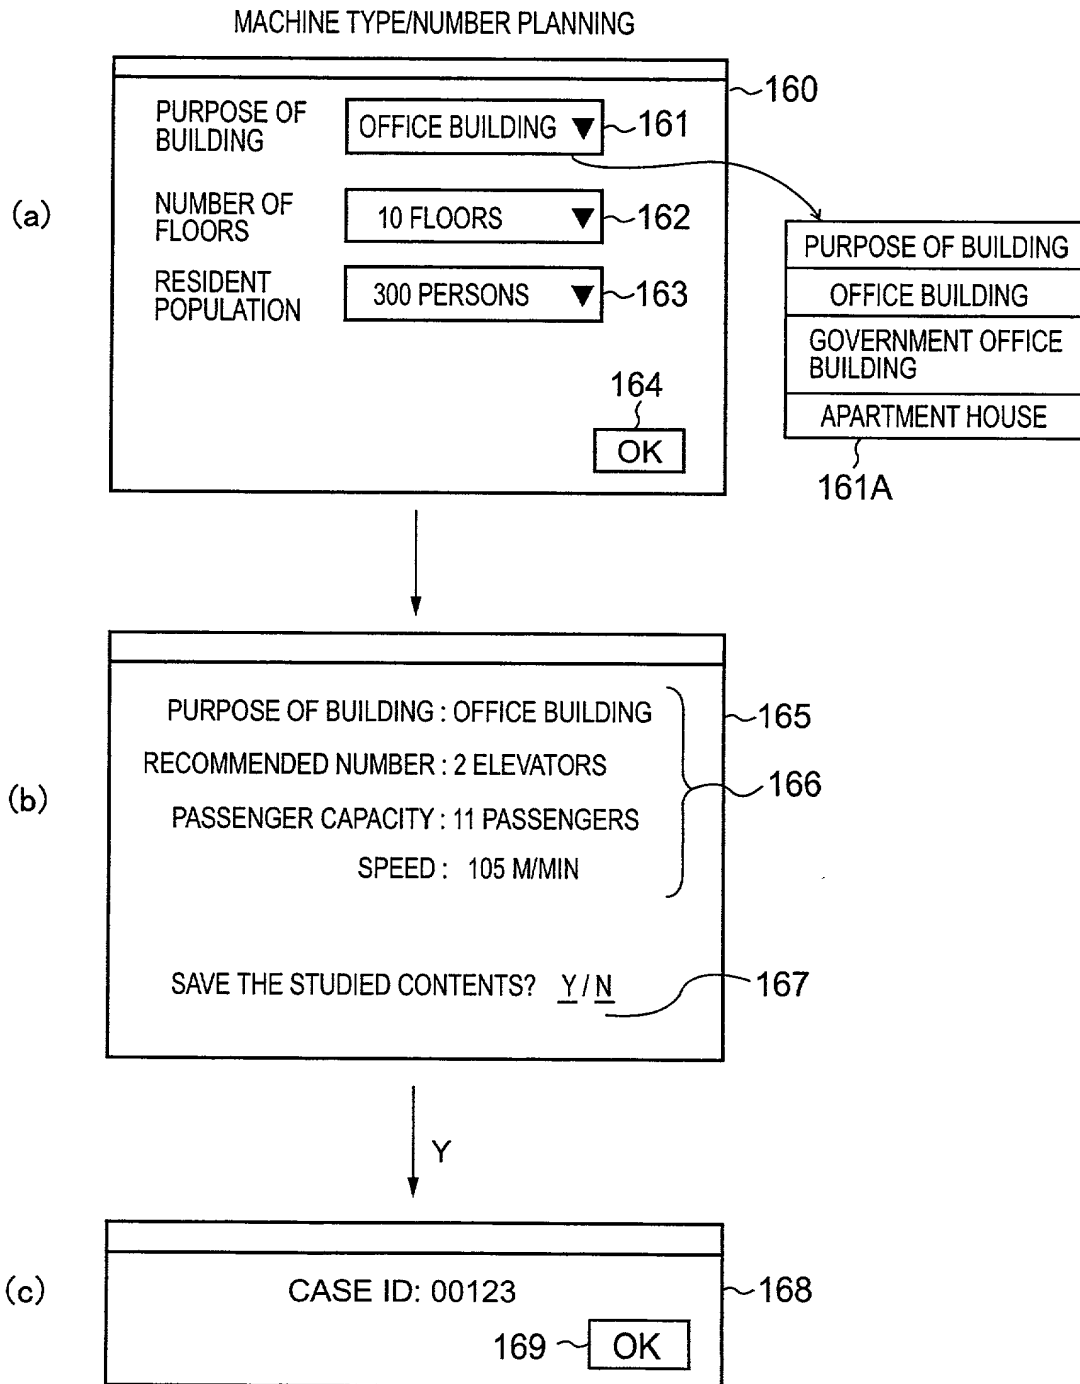


FIG.21

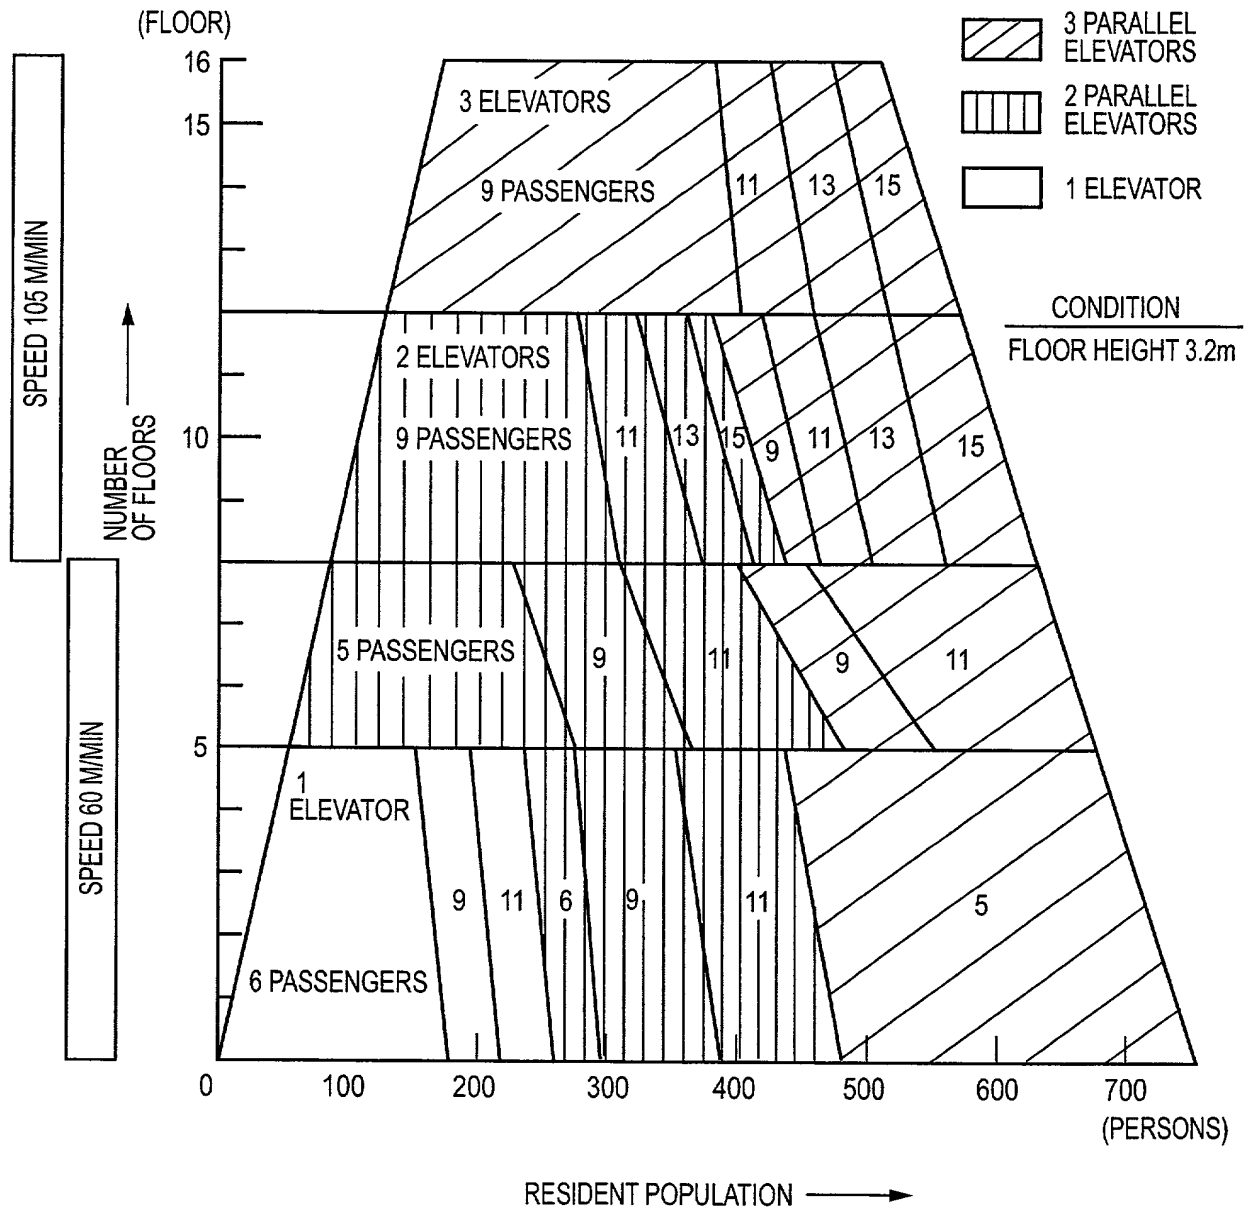


FIG.22

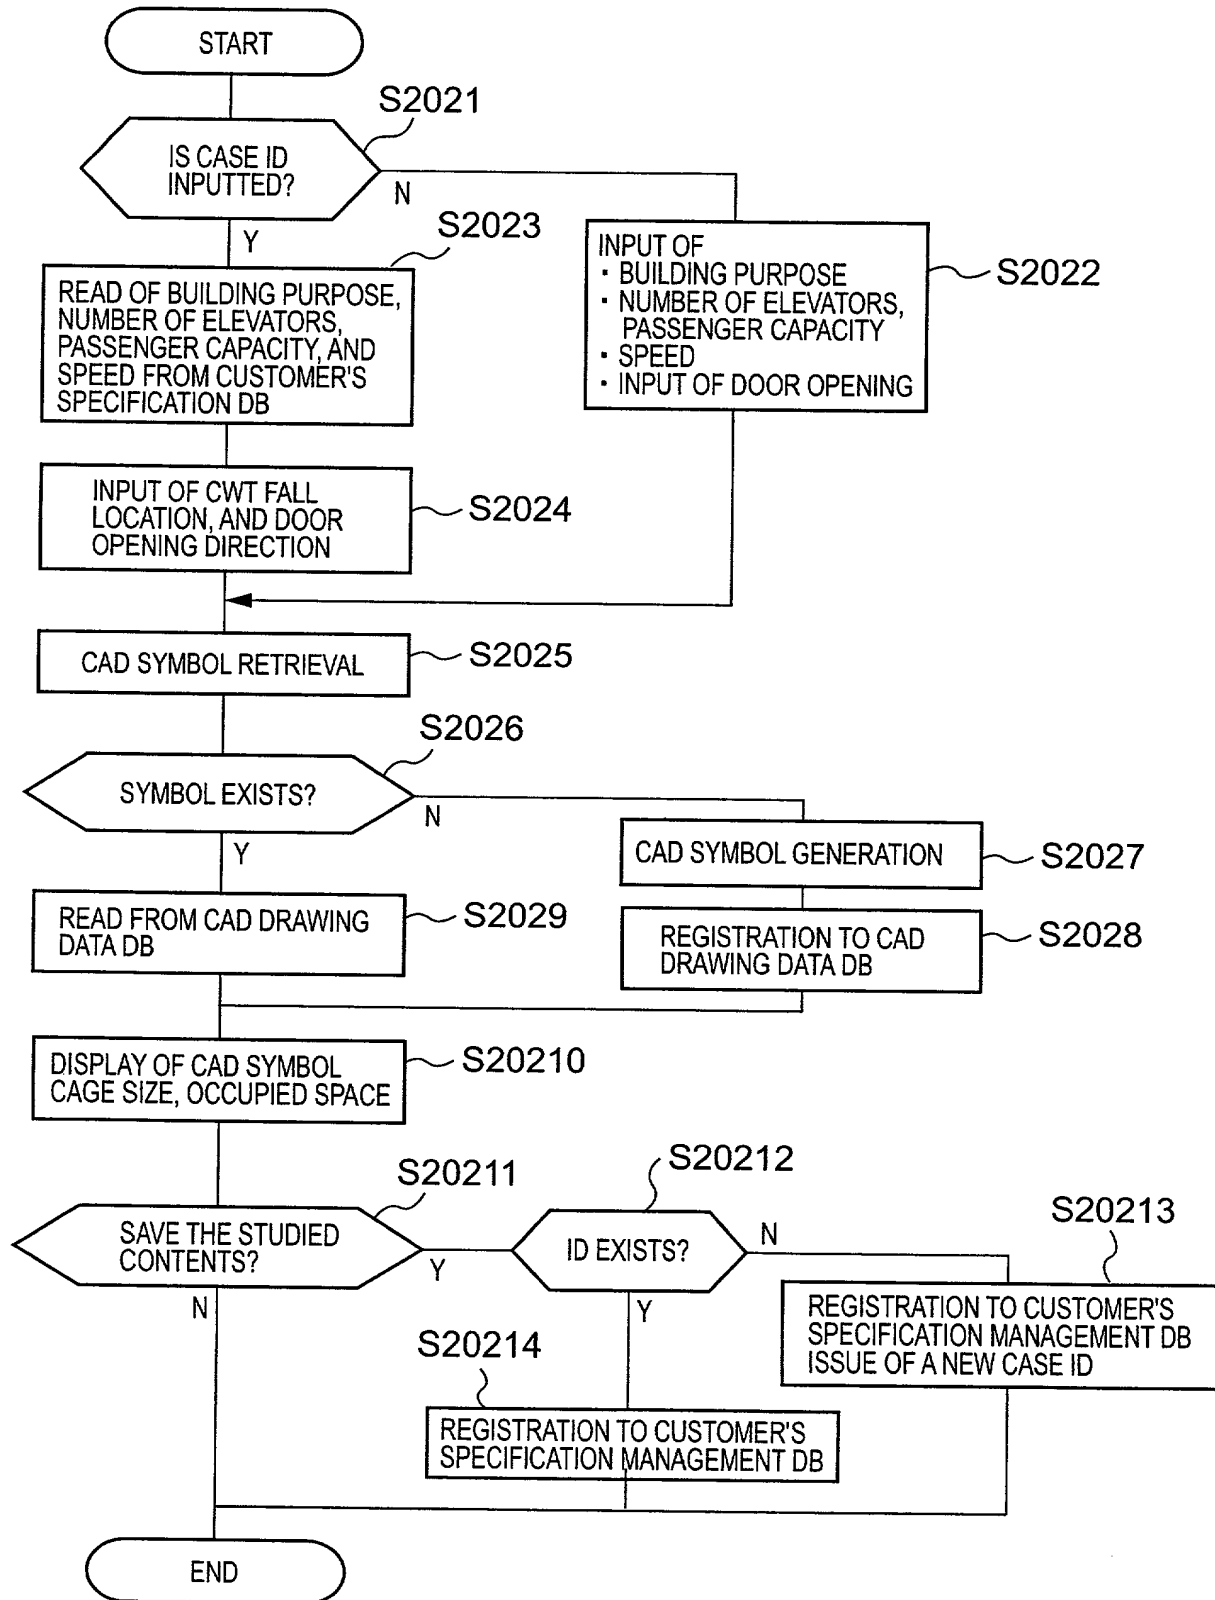


FIG.23

AA HOME | SEARCH |

CAD SYMBOL
DOWNLOAD SERVICE

TO DOWNLOAD A CAD SYMBOL :
PLEASE SELECT "BUILDING PURPOSE", "ELEVATOR PURPOSE", "DOOR OPENING DIRECTION", "PASSENGER CAPACITY/LOAD",
"EXISTENCE OF TRUNK", "SPEED", "COUNTER WEIGHT LOCATION" IN THE ORDER OF "SELECTION ORDER".
SELECTION OF "COUNTER WEIGHT LOCATION" IS AN OPTION.
WHEN A PLURALITY OF ELEVATORS ARE TO BE INSTALLED IN PARALLEL, SPECIFICATIONS CORRESPONDING TO THE
NUMBER OF ELEVATORS SHOULD BE SELECTED.
WHEN YOU FINISH SELECTION OF REQUIRED ITEMS, PLEASE CLICK "SYMBOL DISPLAY" BUTTON.

BUILDING PURPOSE

OFFICE BUILDING (P)

170

SELECTION ORDER	(1)	(2)	(3)	(4)	(5)	(6)
	ELEVATOR PURPOSE	DOOR OPENING DIRECTION	PASSENGER CAPACITY (PERSONS) LOAD (kg)	EXISTENCE OF TRUNK	SPEED (m/min)	COUNTER WEIGHT LOCATION
FIRST	PASSENGER	CENTER OPENING		NON-SPECIFIABLE	60	REAR FALL (LEFT)
SECOND	PASSENGER	CENTER OPENING	9	NON-SPECIFIABLE		REAR FALL (LEFT)
THIRD				NON-SPECIFIABLE		
FOURTH				NON-SPECIFIABLE		
FIFTH				NON-SPECIFIABLE		

SYMBOL DISPLAY

177

171 172 173 174 175 176

FIG.24

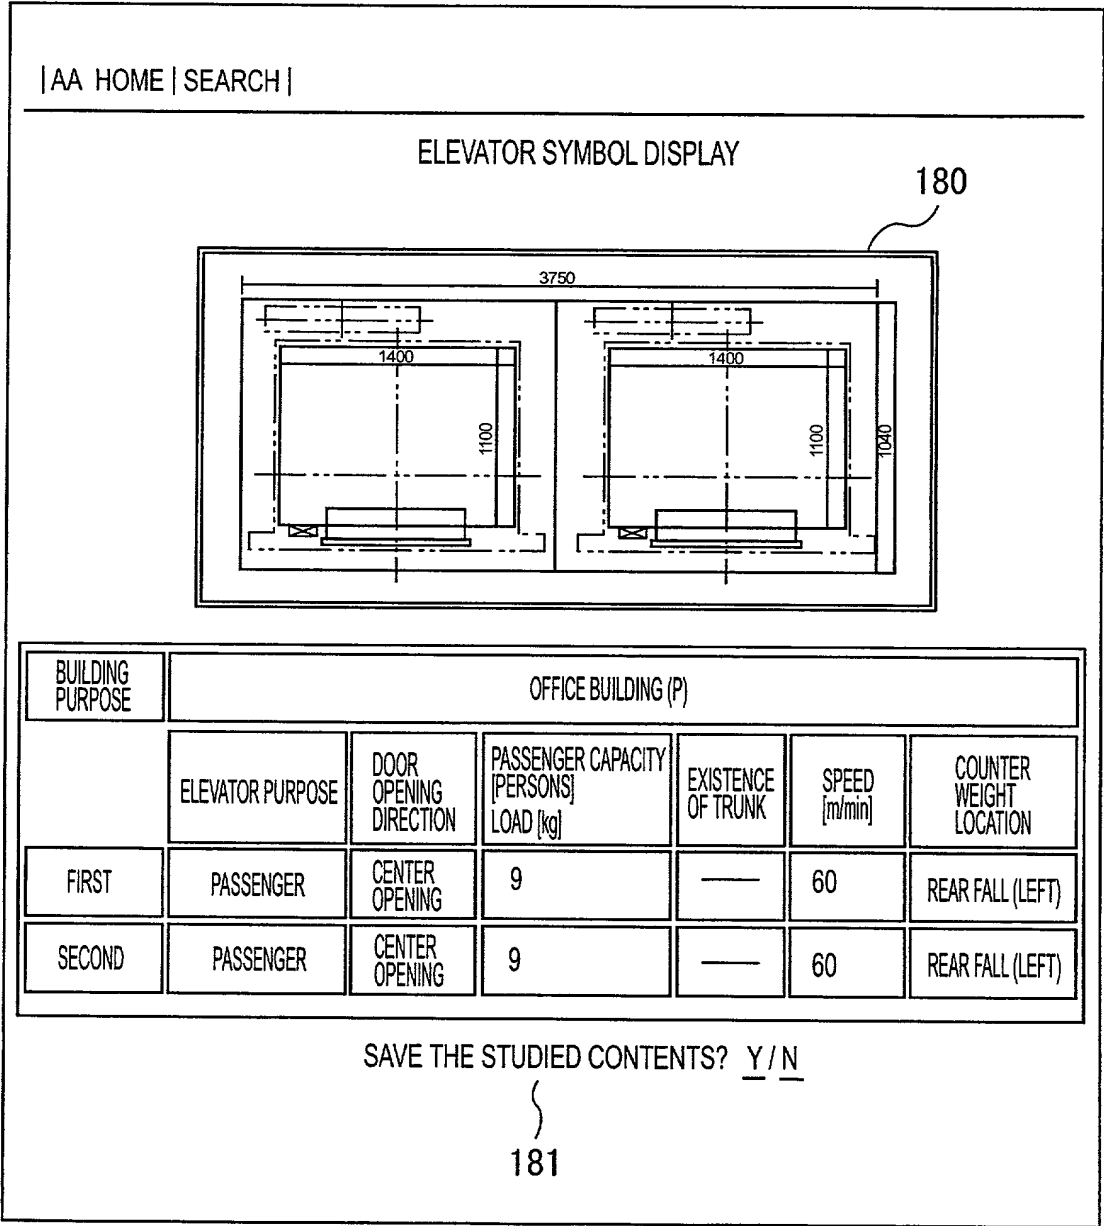


FIG.25

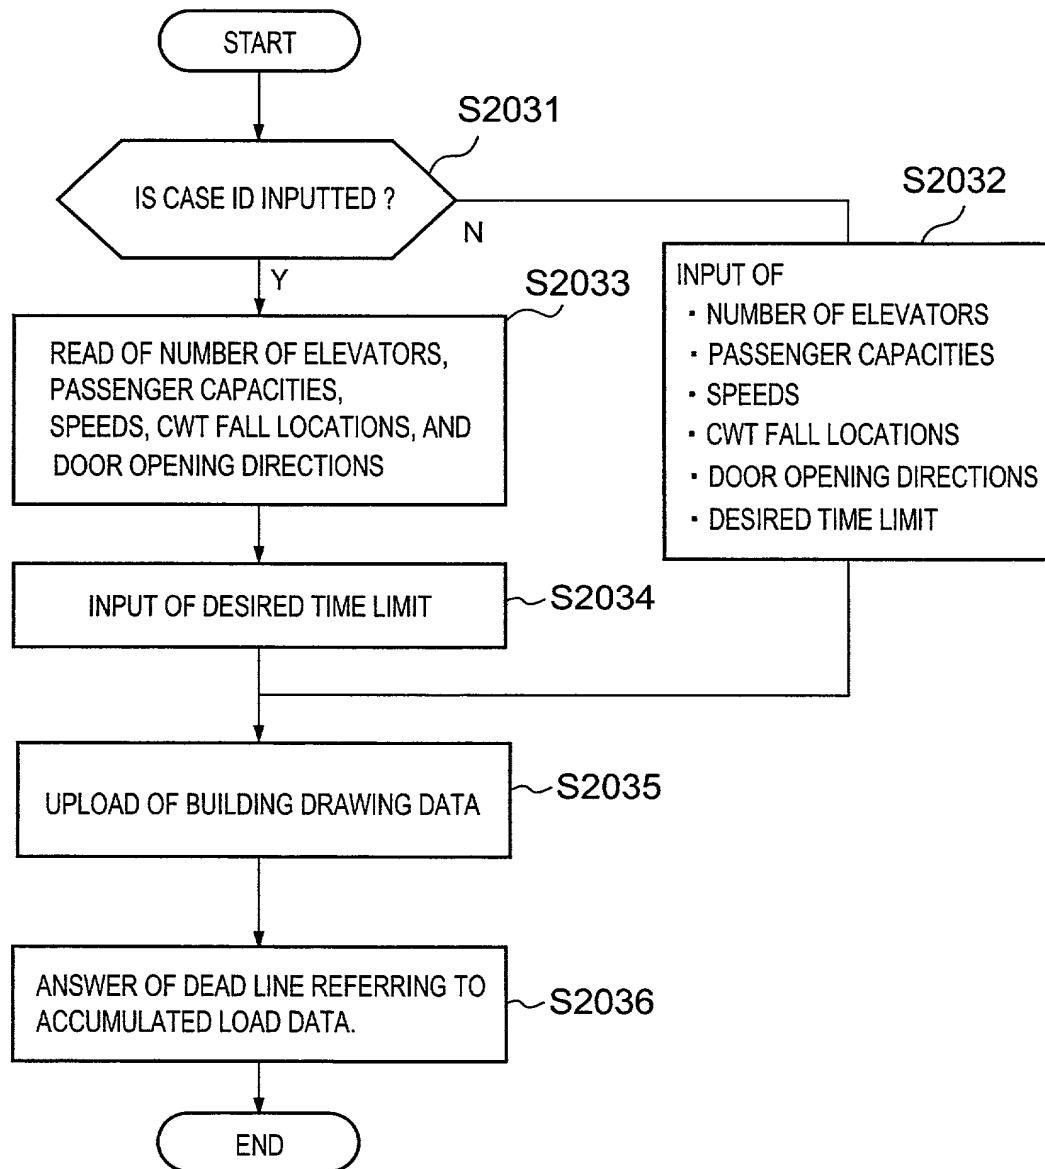


FIG.26

(a)

191

CASE ID		00123	190	
NUMBER OF ELEVATORS :	2	PURPOSE OF BUILDING :	OFFICE	192
		NUMBER OF FLOORS :	10 FLOORS	193
1ST ELEVATOR				
PASSENGER CAPACITY :	11 PASSENGERS	SPEED :	105m/min	
Cwt:	REAR FALL (LEFT)	DOOR OPENING DIRECTION :	CENTER OPENING	194
2ND ELEVATOR				
BUILDING DRAWING DATA UPLOAD		file00123.dxf▼		195
DRAWING REQUISITION DATE :		2000 ▼ / 3 ▼ / 30 ▼		196
		SENDING		197

(b)

DRAWING GENERATION REQUEST CASE ID : 00123		198
DRAWING CAN BE COMPLETED ON OR BEFORE		199
MARCH 30, 2000.		
OK		200

FIG.27

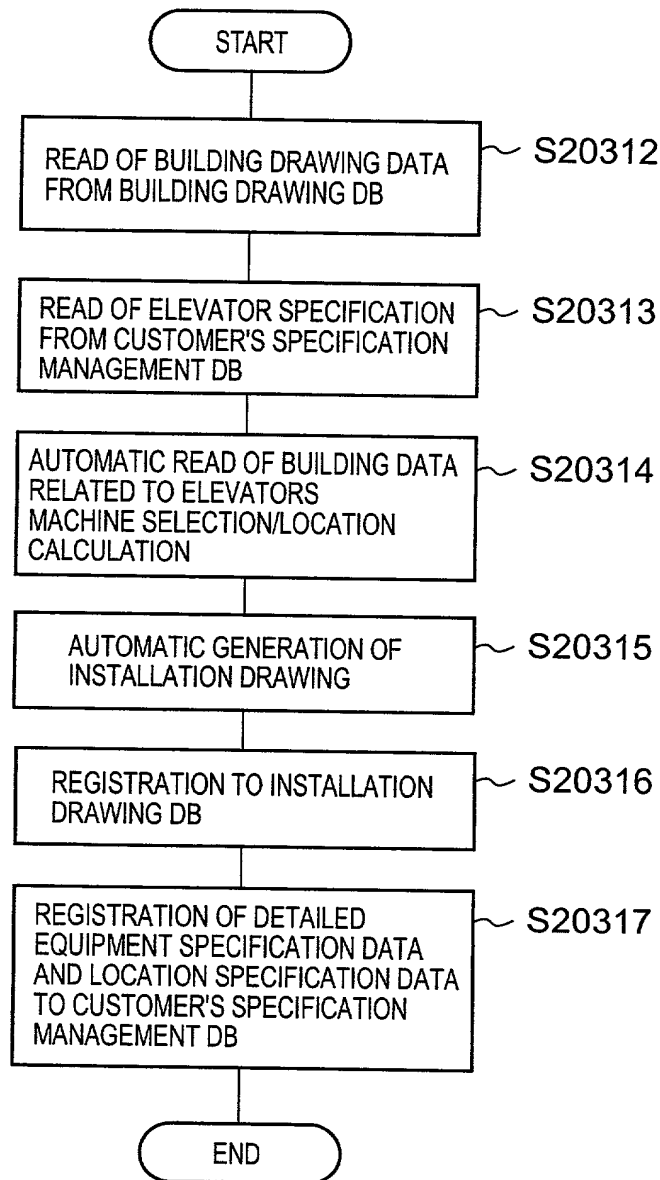


FIG.28

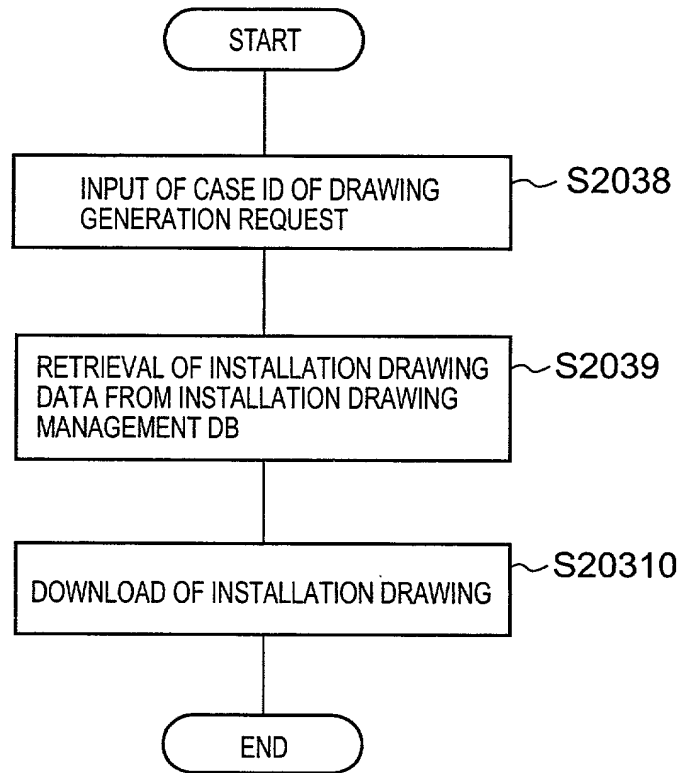


FIG.29

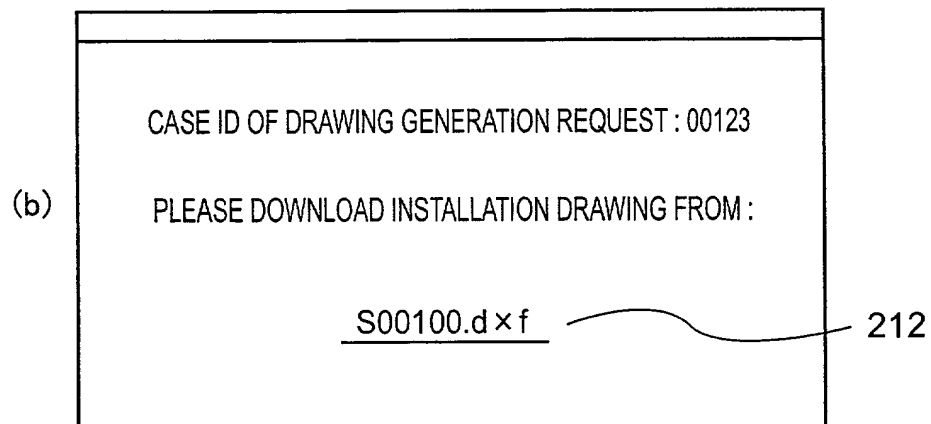
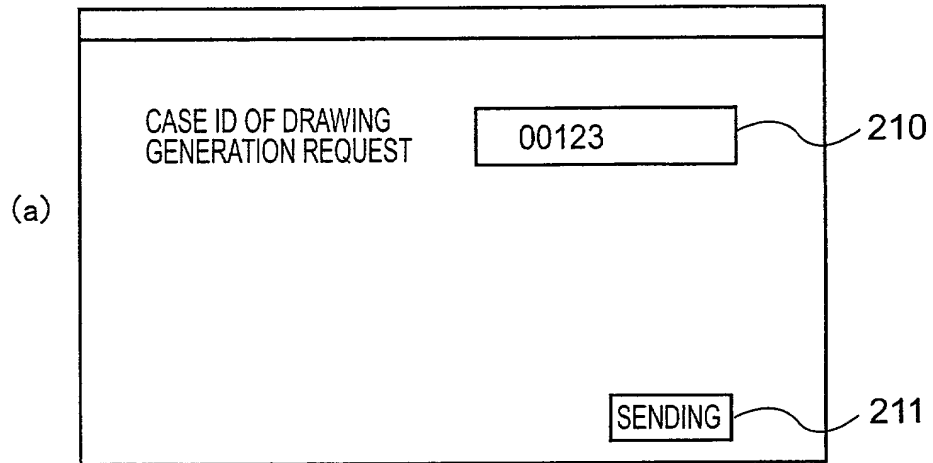


FIG.30

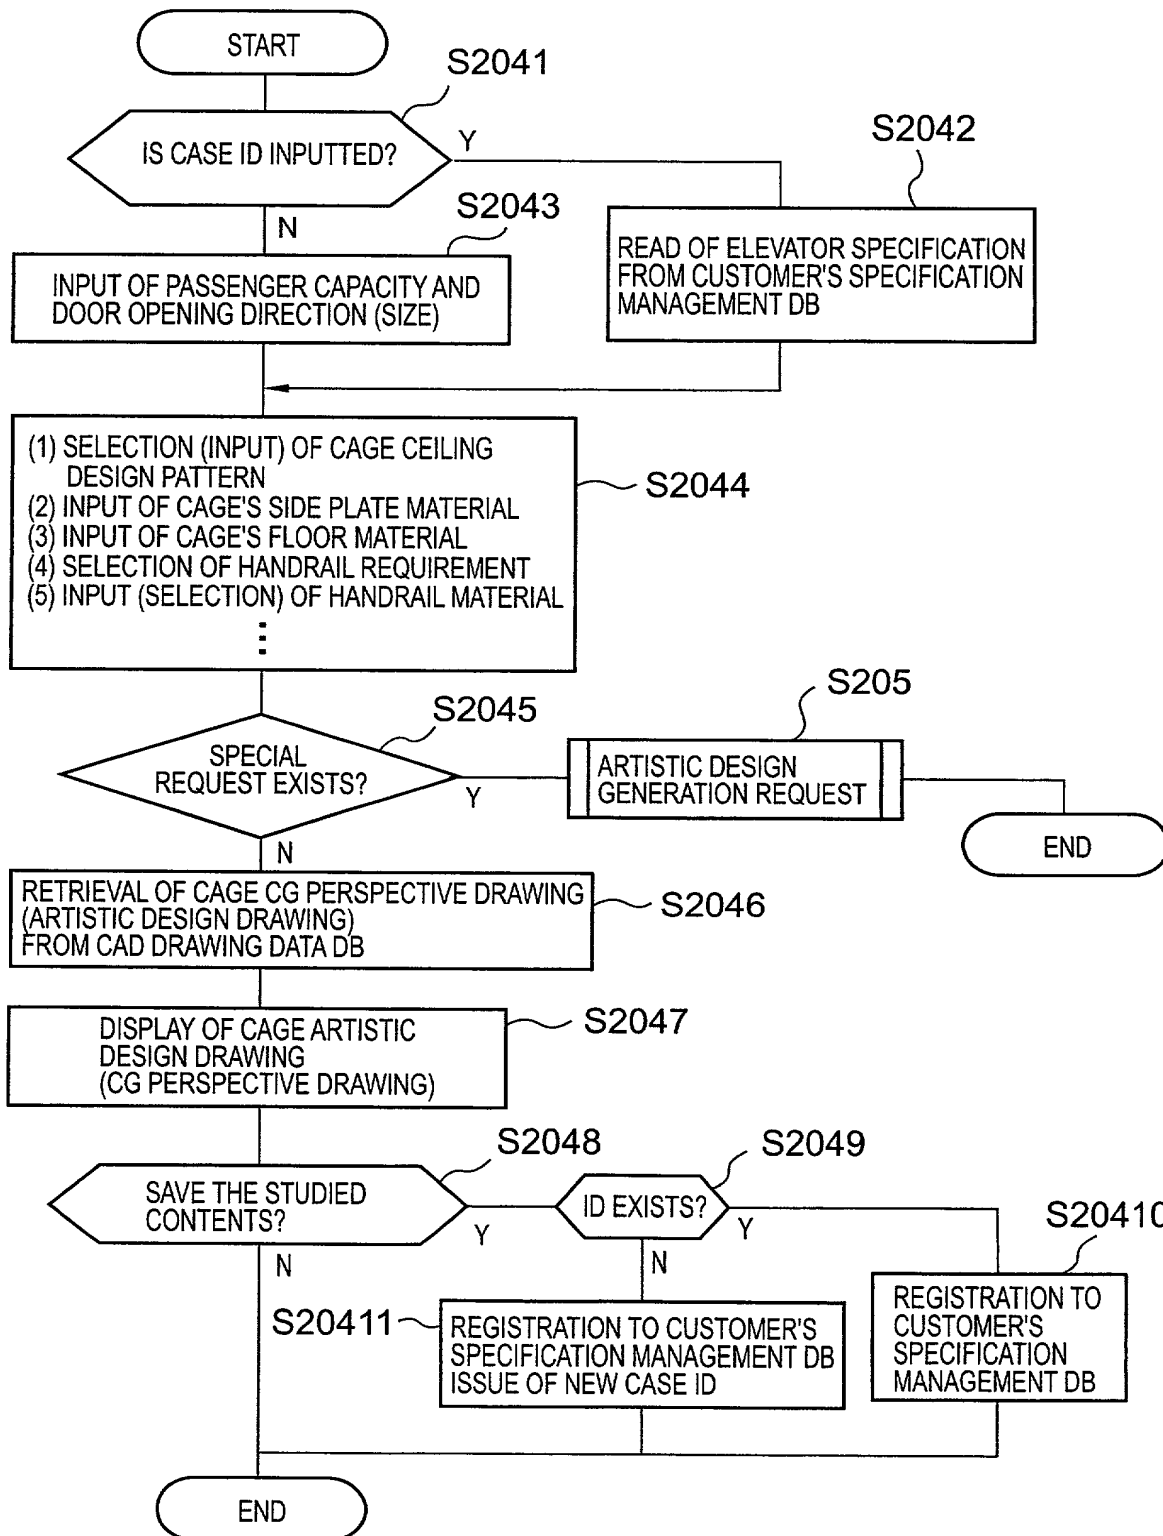


FIG.31

221

CASE ID : 00123 220

PURPOSE OF BUILDING : OFFICE NUMBER OF FLOORS : 10 FLOORS 222

1ST ELEVATOR 223

PASSENGER CAPACITY : 11 PASSENGERS SPEED : 105m/min

DOOR OPENING DIRECTION : CENTER OPENING Cwt: REAR FALL (LEFT)

STUDY OF CAGE'S ARTISTIC DESIGN

(1) CEILING DESIGN PATTERN 224

(2) SIDE PLATE MATERIAL 225

(3) FLOOR MATERIAL 226

(4) HANDRAIL MATERIAL 227

NECESSARY ☒ UNNECESSARY ☐ 228

SENDING 229

FIG.32

(a)

CASE ID : 00123

PURPOSE OF BUILDING : OFFICE NUMBER OF FLOORS : 10 FLOORS

1ST ELEVATOR

PASSENGER CAPACITY : 11 PASSENGERS SPEED : 105m/min

DOOR OPENING DIRECTION : CENTER OPENING Cwt: REAR FALL (LEFT)

STUDY OF CAGE'S ARTISTIC DESIGN

(1) CEILING DESIGN PATTERN

(2) SIDE PLATE MATERIAL

(3) FLOOR MATERIAL

(4) HANDRAIL MATERIAL

NECESSARY ☒ UNNECESSARY ☐

SAVE THE CONTENTS? Y/N

220

221

222

223

224

225

226

227

228

231

(b)

SAVED WITH CASE ID : 00123

OK

232

233

FIG.33

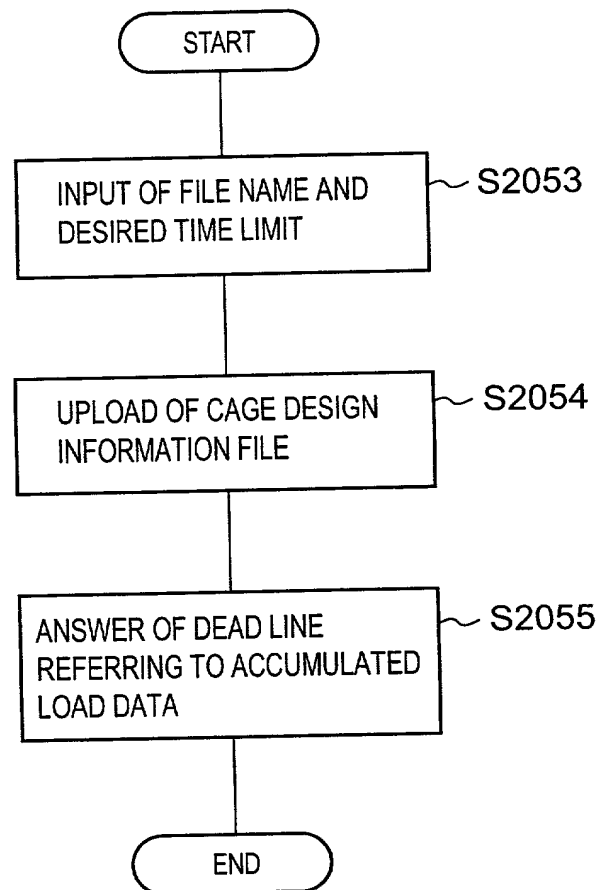


FIG.34

(a)

CASE ID		00123	
NUMBER OF ELEVATORS : 2		PURPOSE OF BUILDING : OFFICE	
1ST ELEVATOR			
PASSENGER CAPACITY : 11 PASSENGERS		SPEED : 105m/min	
Cwt : REAR FALL (LEFT)		DOOR OPENING DIRECTION : CENTER OPENING	
(1) CEILING DESIGN PATTERN : SPECIAL			
DESIGN INFORMATION FOR SPECIAL CASE			
		UPLOAD : <input type="text" value="file0002."/>	
(2) SIDE PLATE : ALUMINUM			
(3) FLOOR : MARBLE			
(4) HANDRAIL : NECESSARY		MATERIAL : BRASS PIPE	
DRAWING REQUISITION DATE <input type="text" value="2000"/> <input type="text" value="5"/> / <input type="text" value="20"/> <input type="text" value=""/>			
<input type="button" value="SENDING"/>			

241

241a

242

243

245



(b)

DRAWING GENERATION REQUEST CASE ID : 00123	
DRAWING CAN BE COMPLETED ON OR BEFORE MAY 20, 2000.	
<input type="button" value="OK"/>	

246

247

FIG.35

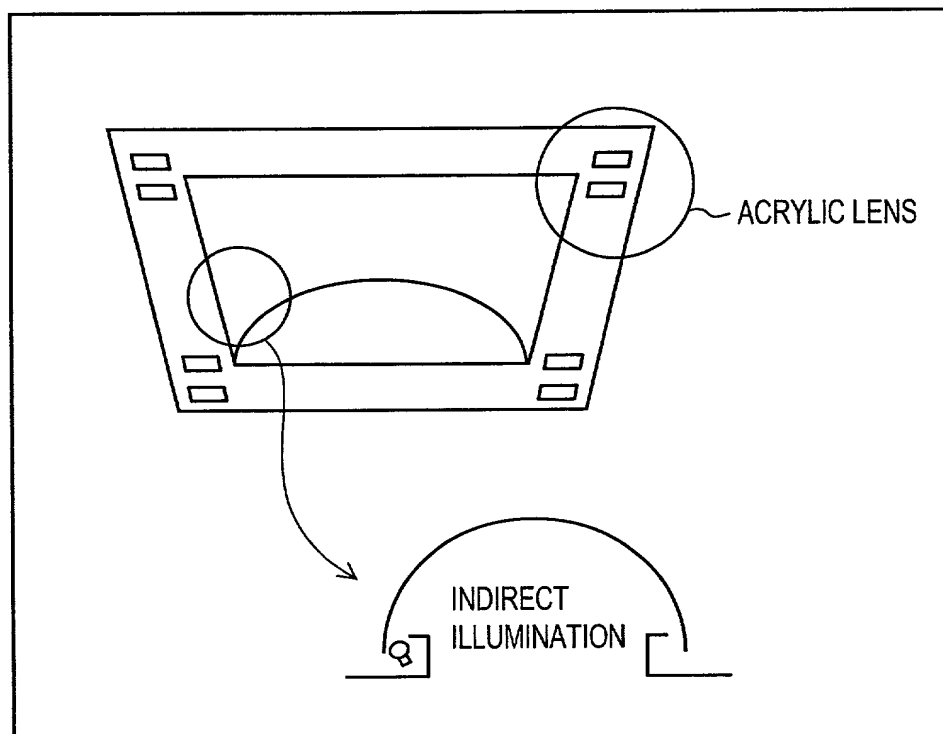


FIG.36


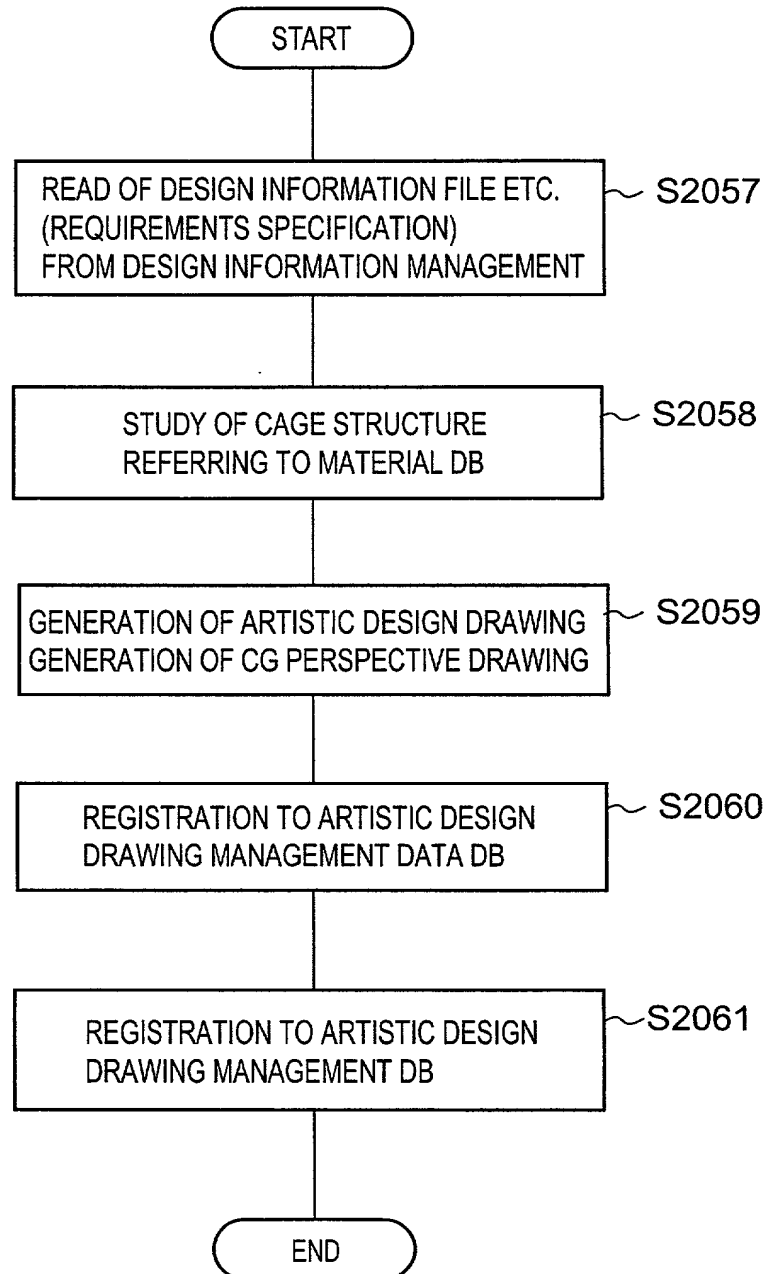


FIG.37

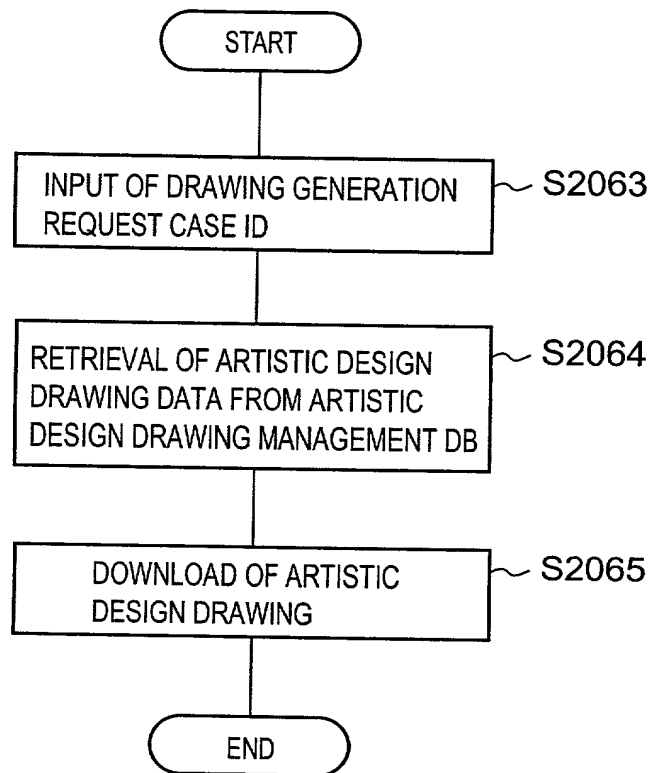

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

REMOTE ORDER ACCEPTANCE DESIGN SYSTEM AND

ELEVATOR REMOTE ORDER ACCEPTANCE METHOD

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) _____に訂正されました。

☒ was filed on 30/August/2000
as United States Application Number or
PCT International Application Number
PCT/JP00/05874 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示している。

Prior Foreign Application(s)

外国での先行出願

<u>11-244955</u>	<u>Japan</u>
(Number)	(Country)
(番号)	(国名)
<u>2000-099724</u>	<u>Japan</u>
(Number)	(Country)
(番号)	(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

<u>31/August/1999</u>	<input type="checkbox"/>
(Day/Month/Year Filed)	
(出願年月日)	
<u>31/March/2000</u>	<input type="checkbox"/>
(Day/Month/Year Filed)	
(出願年月日)	

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

<u>(Status: Patented, Pending, Abandoned)</u>
(現況: 特許許可済、係属中、放棄済)

<u>(Status: Patented, Pending, Abandoned)</u>
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby

appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621

書類送付先

Send Correspondence to:

Antonelli, Terry, Stout & Kraus, LLP
Suite 1800
1300 North Seventeenth Street
Arlington, Virginia 22209

直接電話連絡先： (氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Telephone: (703) 312-6600

Fax: (703) 312-6666

唯一または第一発明者	Full name of sole or first inventor Shingo AKASAKA
発明者の署名	Inventor's signature <i>Shingo Akasaka</i>
日付	Date <i>January 9, 2002</i>
住所	Residence Yokohama, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

第二共同発明者	Full name of second joint inventor, if any
第二共同発明者の署名	Atsuhiro ISHIDA
日付	Second inventor's signature Date
	Atsuhiro Ishida January 21, 2002
住所	Residence
	Yokohama, Japan JPX
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第三共同発明者	Full name of third joint inventor, if any
第三共同発明者の署名	Shinichi TANIGUCHI
日付	Third inventor's signature Date
	Shinichi Taniguchi Jan. 9, 2002
住所	Residence
	Yokohama, Japan JPX
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第四共同発明者	Full name of fourth joint inventor, if any
第四共同発明者の署名	Masahiro OKA
日付	Fourth inventor's signature Date
	Masahiro Oka February 5, 2002
住所	Residence
	Hitachinaka, Japan JPX
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第五共同発明者	Full name of fifth joint inventor, if any
第五共同発明者の署名	Akihiko MORITA
日付	Fifth inventor's signature Date
	Akihiko Morita February 8, 2002
住所	Residence
	Tokyo, Japan JPX
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o Hitachi Building Systems Co., Ltd. 6, 1-chome, Kandanshiki-cho, Chiyoda-ku, Tokyo 101-0054 Japan

(第六以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for sixth and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

第六共同発明者		Full name of sixth joint inventor, if any	
		Hideaki SUZUKI	
第六共同発明者の署名	日付	Sixth inventor's signature	Date
		Hideaki Suzuki	Jan. 10. 2002
住所		Residence	
		Yokohama, Japan JPX	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
		c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第七共同発明者		Full name of seventh joint inventor, if any	
第七共同発明者の署名	日付	Seventh inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第八共同発明者		Full name of eighth joint inventor, if any	
第八共同発明者の署名	日付	Eighth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第九共同発明者		Full name of ninth joint inventor, if any	
第九共同発明者の署名	日付	Ninth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	

(第十以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for tenth and subsequent joint inventors.)